



CR9V-P

Lithium Manganese Dioxide(Li-MnO₂)Batteries




DISCHARGE CHARACTERISTICS

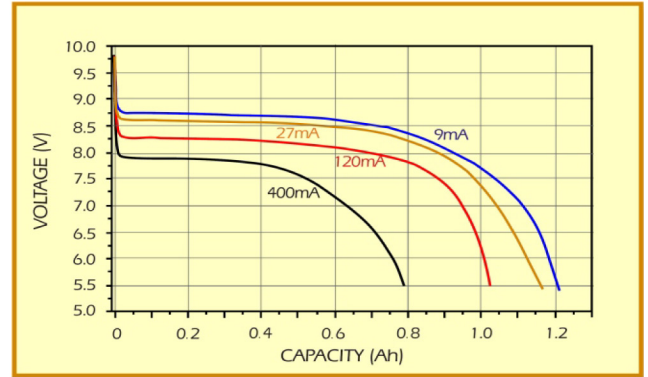

Nominal capacity (9mA, 5.4V off)	1200mAh
Nominal voltage	9.0V
Max. constant current	120mA
Max. pulse current	400mA
Operating temperature	-40~+85°C
Weight	50.5g

TEMPERATURE CHARACTERISTICS

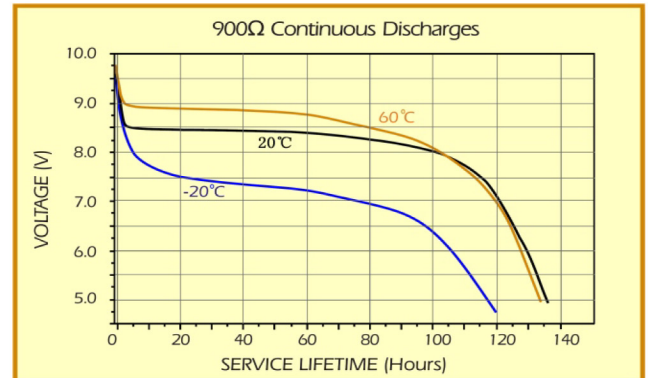

WARNING

- Do not short-circuit between "+" and "-" terminals.
- Do not charge, damage the battery or throw it into fire.
- Do not solder directly on the battery. Please use wire or nickel sheet by spot welding.
- Take out the battery when discharged to cut-off voltage, and dispose of according to the national and local laws.

SHORT CIRCUIT TEMPERATURE VS. CURRENT VS. TIME

