

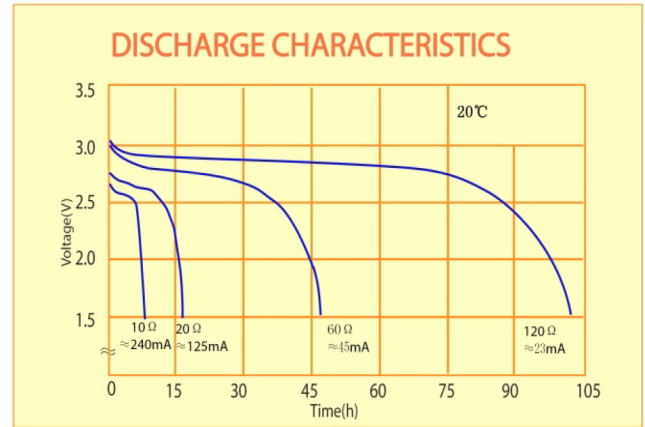


# CR17505

Lithium Manganese Dioxide(Li-MnO<sub>2</sub>)Batteries

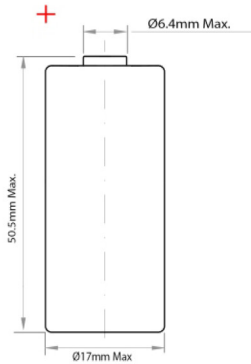

Nominal capacity (10mA, 2.0V off)	2400mAh
Nominal voltage	3.0V
Max. constant current	1500mA
Max. pulse current	3000mA
Operating temperature	-40~+85°C
Weight	30.0g

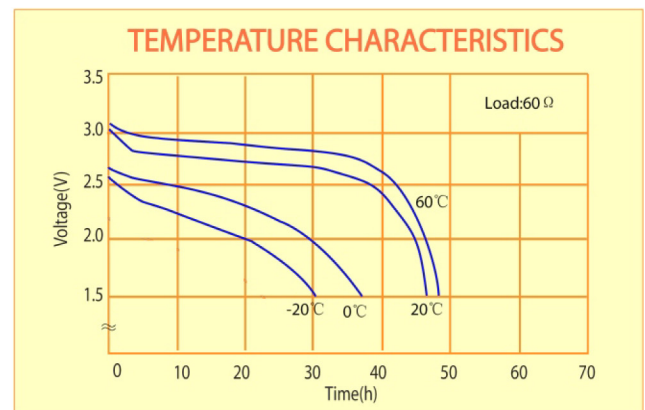

## WARNING

- Do not short-circuit between "+" and "-" terminals.
- Do not charge, damage the battery or throw it into fire.
- Do not solder directly on the battery. Please use wire or nickel sheet by spot welding.
- Take out the battery when discharged to cut-off voltage, and dispose of according to the national and local laws.

