

Secondary Battery



Ni-CD Battery



Document Title: T-D5000T 1.2V

Revision: A/0

Page 1 of 1

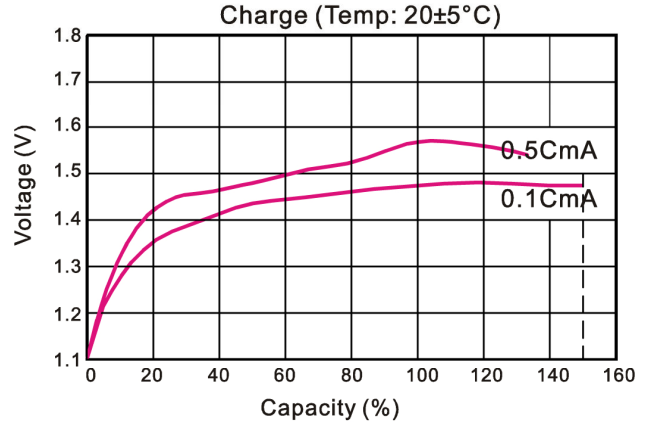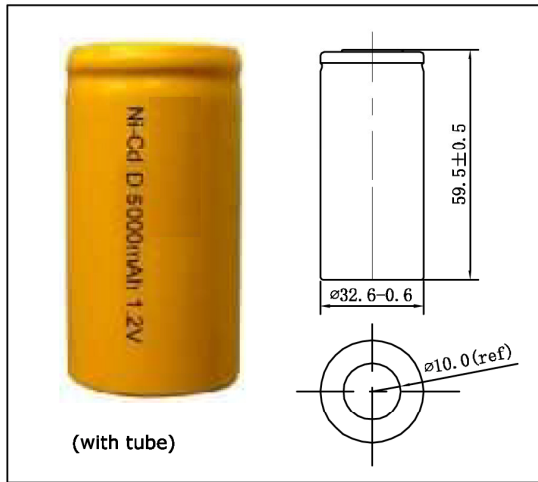

Type: Rechargeable Nickel Cadmium Cylindrical Cell

Nominal Dimension: $\Phi=32.2\text{mm}$ H=60.0mm

Applications: Recommended discharge current 500 to 5000mA

Nominal Voltage: 1.2V

Capacity: (mAh)	Rate	Minimum	Typical
When discharged to 1.0V at 20°C	0.2C	5000(300min)	5250(315min)
	1C	4500(54min)	4750(57min)

Charge Retention: 65% of nominal capacity after cell storage at 20°C for 28 days.
When discharged at 1000mA to 1.0V at 20°C

Charge Condition: 500mA for 16hrs at 20°C

Fast Charge: 150mA to 250mA (0.03C to 0.05C)
charge termination control recommended control parameters:
- ΔV : 5mV
DT/dt : 0.8°C/min(0.03C to 0.05C)
TCO : 45-50°C

Service Life: >500 Cycles (IEC standard)

Continuous 500mA maximum current for 48 hrs.

Overcharge: No conspicuous deformation and/or leakage

Approx Weight: 120.0g

Internal Resistance: Average 18m Ω upon fully charged
Range 10-25m Ω at 1000Hz

Max. Charging Voltage: 1.65V at 1500mA charging.

Ambient temperature Range:	charging	0°C to 70°C
	Discharging	-20°C to 70°C
	Storage	-20°C to 35°C
	Storage(1 week)	-20°C to 60°C

