

Secondary Battery



Ni-MH Battery



Document Title: TH-C3000C 1.2V

Revision: A/0

Page 1 of 1

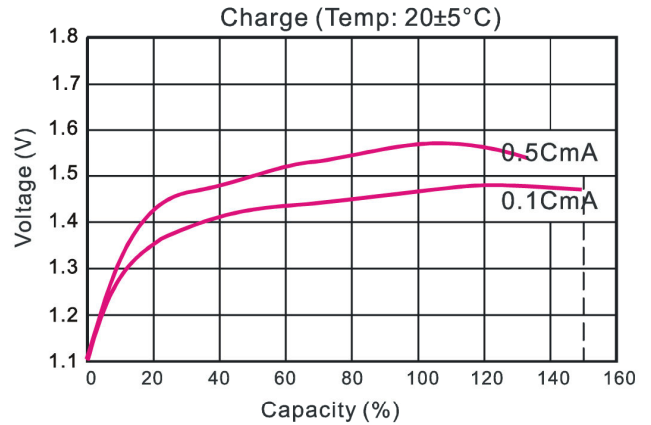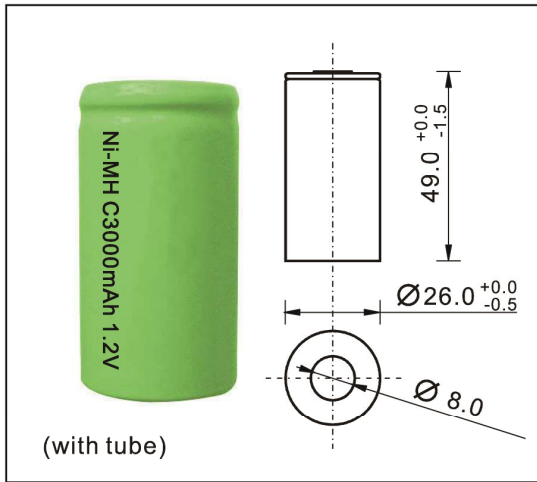

Type: Rechargeable Nickel Metal Hydride Cylindrical Cell

Nominal Dimension: Φ=26.0mm H=49.0mm

Applications: Recommended discharge current 300 to 6000mA

Nominal Voltage: 1.2V

Capacity: (mAh)	Rate	Minimum	Typical
	0.2C	3000(300min)	3150(310min)
When discharged to 1.0V at 20°C	0.5C	2700(114min)	2850(116min)
	1C	2400(54min)	2550(55min)

Charge Retention: 65% of nominal capacity after cell storage at 20°C for 28 days.
When discharged at 600mA to 1.0V at 20°C

Charge Condition: 300mA for 16hrs at 20°C

Fast Charge: 600mA to 1500mA (0.2C to 0.5C)
charge termination control recommended
control parameters:
-ΔV : 5mV
DT/dt : 0.8°C/min(0.2C to 0.5C)
TCO : 45-50°C
Timer : 105% nominal input
(for ref. only)

Service Life: >500 Cycles (IEC standard)

Continuous 300mA maximum current for 48 hrs.

Overcharge: No conspicuous deformation and/or leakage

Approx Weight: 62.0g

Internal Resistance: Average 16mΩ upon fully charged
Rance 13-20mΩ at 1000Hz

Max. Charging Voltage: 1.65V at 1500mA charging.

Ambient temperature Range:	Standard charging	0°C to 45°C
	Fast charging	10°C to 40°C
	Discharging	-20°C to 60°C
	Storage	-20°C to 30°C

