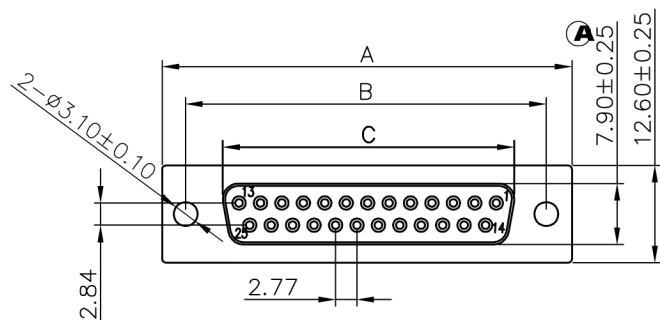


Poles	A±0.25	B±0.25	C±0.25
09	30.80	25.00	16.30
15	39.20	33.32	24.70
25	53.05	47.04	38.40
37	69.40	63.50	54.80

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
2	Contact	9~37	Brass	T=0.20mm	Gold/Tin Flashed
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

PART NO	Color
CDBDXXF	Black
CDBDXXF(BL)	Blue
CDBDXXF(W)	White

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 5.0 Kgf Max.
- 2.6 Total unmating force: 1.7 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts: Gold/Tin flashed.
- 3.2 Shell: Tin plated.

DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
D-SUB SOLDER(F)	mimi	(公差) .x ±0.3	R3			
	CHECKED(確認):	.xx ±0.20	UNIT:	R0	RELEASE	2007.01.05
	MANDY	.xxx ±0.100	mm	R1	補充料號說明	2007.09.03
PART NO: CDBDXXF()	APPROVAL(核准):	ANG. ±1°	SIZE:	R2	變更Front-shell(原:N)Contact Plated(原:A)	2008.07.31
DWG NO(圖號): DS-XXS	JOHNNY	SCALE(比例):	A4	R3	變更Front-shell(原:N)Contact Plated(原:A)	2010.09.27
		FREE	SHEET: 1/1			