

A

B

C

D

E

NOTES:

1. MATERIAL

- 1.1 Insulator: PBT +30% Glass Fiber, UL94V-0
- 1.2 Color: Black
- 1.3 Contact: Brass
- 1.4 Contact Plated: Gold-flash over nickel plated
- 1.5 Dip area plated: Tin plated or Gold-flash
- 1.6 Shell: SPCC plate with nickel plated
- 1.7 Screw: Copper Alloy with nickel plated

2. SPECIFICATION

- 2.1 Dielectric Strength: 500V for one minute
- 2.2 Insulator Resistance: 1000MΩ Min. at 500V DC
- 2.3 Contact Resistance: 20mΩ max.
- 2.4 Temperature: -55℃ ~ +105℃
- 2.5 Rated Current: 5Amp

PART NO.






CDBR XX H F XX -

Type: T : Jack Screw Insert UN : Rivet U : Rivet & Jack Screw Attached UT : Rear & Jack Screw Insert

Female H: High Density Pin Size

Series No. D-SUB 90°

Contact: * : Gold Flash / Tin plated 2: Gold Flash

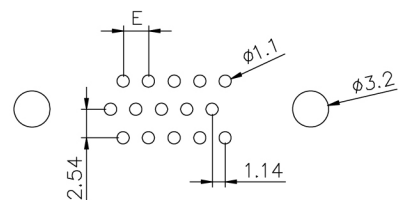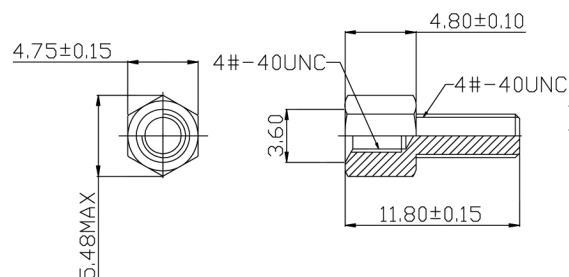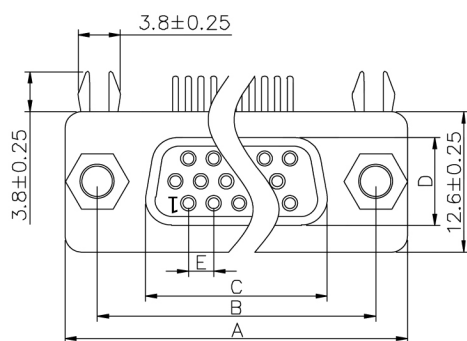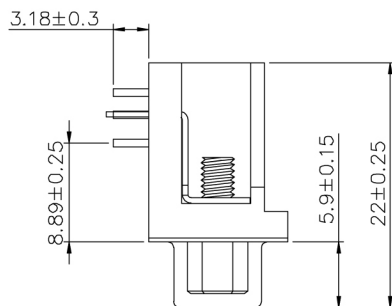

Poles	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25
15	30.81	24.99	16.33	7.90	2.29
26	39.25	33.32	24.66	7.90	2.29
44	53.04	47.04	38.38	7.90	2.29
62	69.32	63.50	54.84	7.90	2.41

T Type	UN & U Type	UT Type
叉鎖	鉚合不附螺絲 鉚合附螺絲	鉚合鎖螺絲

DESCRIPTION(內容):

D-SUB 90° (Female) 三排
半金. 全金 (黑)

PART NO:
(料 號)

CDBRXXHFXX-__

DWG NO(圖號):

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)
.0 ±0.1
.00 ±0.02
.000 ±0.03

SCALE(比例):

FREE

REV:

R0

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV:

R0

REV:

R1

REV:

R2

REV:

R3

DESCRIPTION

RELEASE

DATE

2014.12.31

A

B

C

D

E