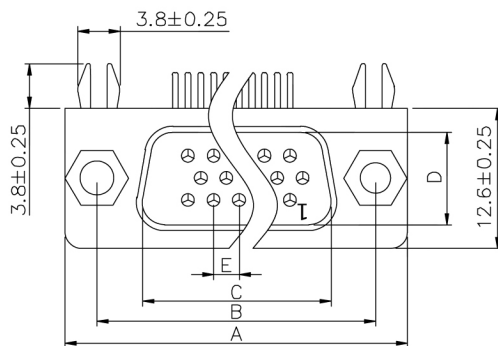
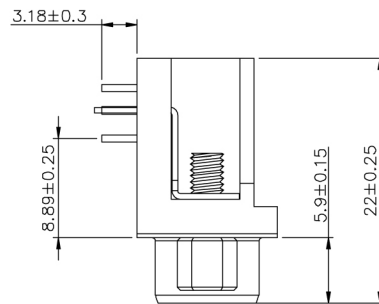
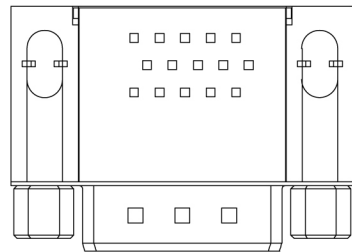


Poles	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25
15	30.81	24.99	16.92	8.38	2.29
26	39.25	33.32	25.25	8.38	2.29
44	53.04	47.04	38.96	8.38	2.29
62	69.32	63.50	55.42	8.38	2.41

NOTES:

1. MATERIAL

- 1.1 Insulator: PBT +30% Glass Fiber, UL94V-0
- 1.2 Color: Black
- 1.3 Contact: Brass
- 1.4 Contact Plated: Gold-flash over nickel plated
- 1.5 Dip area plated: Tin plated or Gold-flash
- 1.6 Shell: SPCC plate with nickel plated
- 1.7 Screw: Copper Alloy with nickel plated

2. SPECIFICATION

- 2.1 Dielectric Strength: 500V for one minute
- 2.2 Insulator Resistance: 1000MΩ Min. at 500V DC
- 2.3 Contact Resistance: 20mΩ max.
- 2.4 Temperature: -55°C ~ +105°C
- 2.5 Rated Current: 5Amp

PART NO.

CDBR	XX	H	M	XX	-	Contact:
						Type:
						T : Jack Screw Insert
						UN : Rivet
						U : Rivet & Jack Screw Attached
						UT : Rear & Jack Screw Insert
						Pin Size
						Series No. D-SUB 90°

T Type	UN & U Type	UT Type
叉鎖	鉚合不附螺絲 鉚合附螺絲	鉚合鎖螺絲

DESCRIPTION(內容):

**D-SUB 90° (Male) 三排
半金. 全金 (黑)**

PART NO:
(料 號)

DWG NO(圖號):

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:

(公差)	
.0	±0.1
.00	±0.02
.000	±0.03

SCALE(比例):

FREE



REV:

R0

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

DATE

2014.12.31