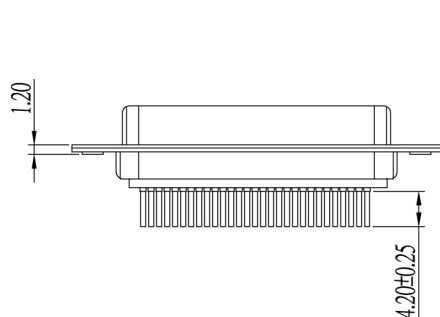
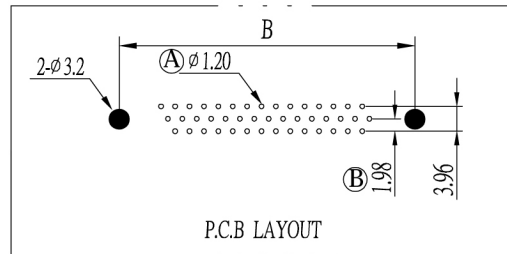
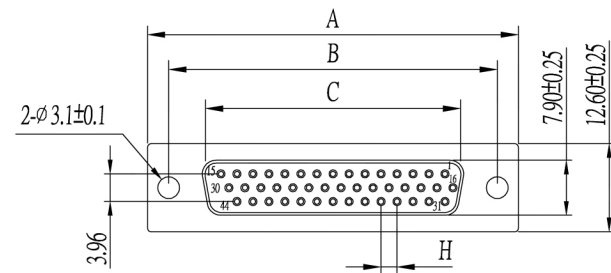


Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mW Max.
- 2.4 Insulation resistance: 1000 MW Min at DC 500V.
- 2.5 Total mating force: 7.0 Kgf Max.
- 2.6 Total unmating force: 3.5 Kgf Min.
- 2.7 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 contacts: Gold flashed 1u".
- 3.2 Shell: Tin plated.

PART NO	Color
CDBSXXHF	Black
CDBSXXHF(BL)	Blue
CDBSXXHF(W)	White

Poles.	A±0.25	B±0.25	C±0.25	H±0.20
15	30.80	25.00	16.33	2.29
26	39.20	33.32	24.66	2.29
44	53.05	47.04	38.38	2.29
62	69.40	63.50	54.84	2.41

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
2	Contact	15~62	Brass	T=0.20mm	Gold Flashed
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE(公差):		REV:	REV	DESCRIPTION	DATE
				R3			
	CHECKED(確認):			UNIT:			
	TERESA			mm			
	APPROVAL(核准):			SIZE:			
PART NO: CDBSXXHF()	JOHNNY	SCALE(比例):	FREE	A4	R0	RELEASE	2007.04.11
DWG NO(圖號): HDIP-XXS				SHEET:	R1	Layout 4.0mm 獨立 4PIN 的尺寸, 將改為系列 (B)	2007.04.12
				1/1	R2	修正電鍍 Shell (N→Ti) & 補充 Color 料號說明	2008.08.27
					R3	新增 (A) & (B) 尺寸	2014.12.01