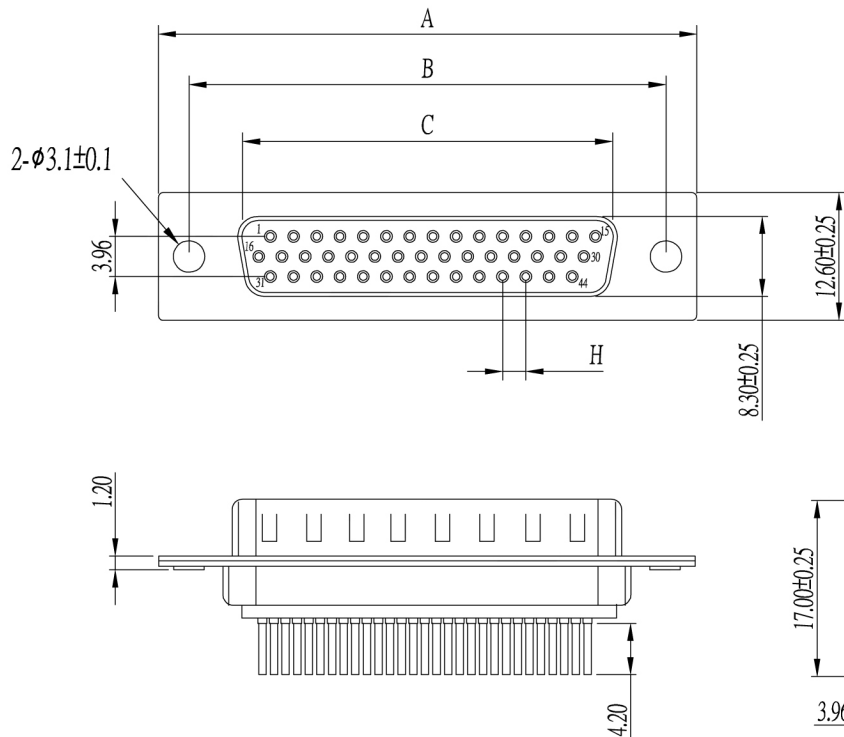


PC BOARD LAYOUT

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass, t=0.20mm.
- 1.3 Shell: Cold rolled steel, t=0.40mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mW Max.
- 2.4 Insulation resistance: 1000 MW Min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 contacts: Gold flashed 1u".
- 3.2 Shell: Tin plated.

PART NO	Color
CDBSXXHM	Black
CDBSXXHM(BL)	Blue
CDBSXXHM(W)	White

Poles.	A±0.25	B±0.25	C±0.25	H±0.25
15	30.80	25.00	16.92	2.29
26	39.20	33.32	25.25	2.29
44	53.05	47.04	38.96	2.29
62	69.40	63.50	55.42	2.41

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
2	Contact	15~62	Brass	T=0.20mm	Gold Flashed
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

DESCRIPTION(内容):

D-SUB DIP HDD (Male)

PART NO: CDBSXXHM()

DWG NO(圖號): HDIP-XXP

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:(公差)

.x ±0.3
.xx ±0.20
.xxx ±0.100
ANG. ±1°

SCALE(比例):

FREE

REV:

R1

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE

新增 (A) & (B) 尺寸

DATE

2008.12.30

2014.12.01