

A

B

C

D

E

Note:

1.Material:

1.1 Insulator: P.B.T UL 94-V0 rated.

1.2 Contact: Brass,t=0.20mm.

1.3 Shell: Cold rolled steel,t=0.40mm.

2.Specification:

2.1 Current rating: 1 A Max.

2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.

2.3 Contact resistance: 30 mW Max.

2.4 Insulation resistance: 1000 MW Min at DC 500V.




2.5 Temperature range: -55°C~+105°C

3.Finishes:

3.1 contacts: Gold flashed 1u".

3.2 Shell: Tin plated

PART NO.	Color
CDBSXXM	Black
CDBSXXM(BL)	Blue
CDBSXXM(W)	White

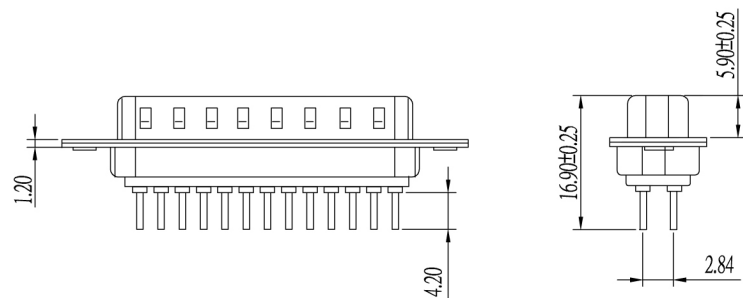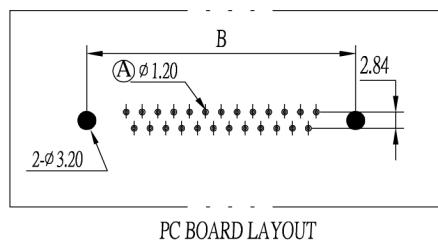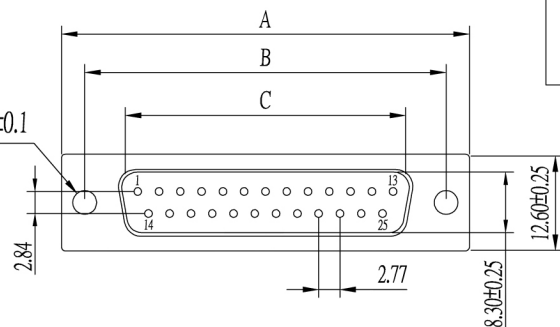

Poles.	A±0.25	B±0.25	C±0.25
09	30.80	25.00	16.92
15	39.20	33.32	25.25
25	53.05	47.04	38.96
37	69.40	63.50	55.42

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Tin Plated
2	Contact	9~37	Brass	T=0.20mm	Gold Flashed
1	Housing	2	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

DESCRIPTION(內容):

D-SUB DIP (MALE)

PART NO: CDBSXXM()

DWG NO(圖號): DIP-XXP

DRAWN(製圖):

GONG

CHECKED(確認):

TERESA

APPROVAL(核准):

JOHNNY

GENERAL TOLERANCE:(公差)

.x ±0.3

.xx ±0.20

.xxx ±0.100

ANG. ±1°

SCALE(比例):

FREE



REV:

R2

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

RELEASE (R0)

修正電鍍 (R1)

新增 (R2) 尺寸

DATE

2008.07.11

2008.08.01

2014.12.01