
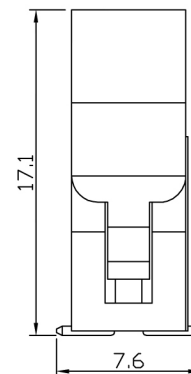
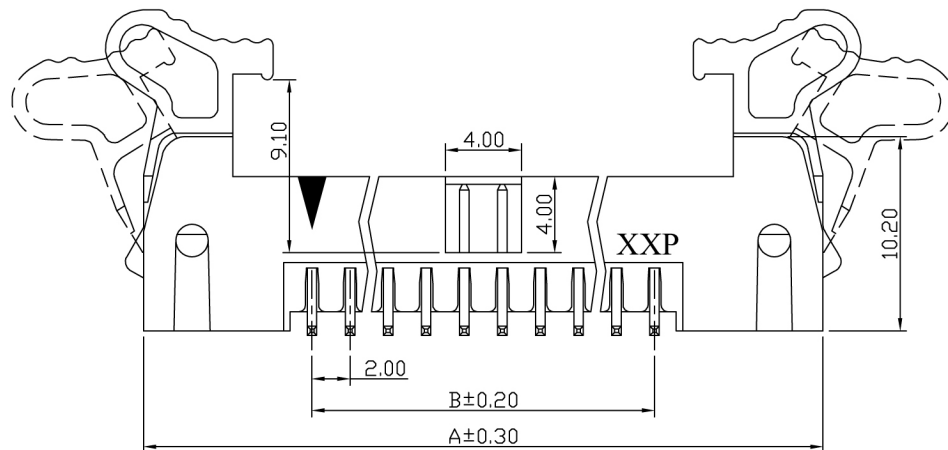


PCB Layout
(Top View)

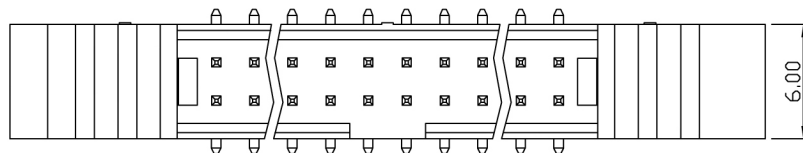

MATERIAL AND FINISH

Housing: Nylon-6T (UL94V-0), Black.
Terminal: Brass, Gold Plating.

ELECTRICAL CHARACTERISTICS

Current Rating: 1.0 Amp. Max..
Dielectric Withstand Voltage:
800V AC RMS for 60Seconds.
Insulation Resistance:
1000M Ohms Min. at 500V DC.

MECHANICAL CHARACTERISTICS

Operating Temperature: -55°C ~ +105°C.

所有材料為
"環保材料"
2006.7.04
RoHS

| PART NO. | Dimensions | |
|------------|------------|-------|
| | A | B |
| CHE200010S | 25.70 | 8.00 |
| CHE200012S | 27.70 | 10.00 |
| CHE200014S | 29.70 | 12.00 |
| CHE200016S | 31.70 | 14.00 |
| CHE200020S | 35.70 | 18.00 |
| CHE200022S | 37.70 | 20.00 |
| CHE200024S | 39.70 | 22.00 |
| CHE200026S | 41.70 | 24.00 |
| CHE200030S | 45.70 | 28.00 |
| CHE200034S | 49.70 | 32.00 |
| CHE200040S | 55.70 | 38.00 |
| CHE200044S | 59.70 | 42.00 |
| CHE200050S | 65.70 | 48.00 |

DESCRIPTION(內容):
**2.00mm Box Header Ejector PCB
Surface Mount Type with Short Latch**

DRAWN(製圖):
KAY

CHECKED(確認):
MANDY

APPROVAL(核准):
JOHNNY

PART NO:
(料號) **CHE2000XXS**

DWG NO(圖號): **HD22210426**

GENERAL TOLERANCE:
(公差)
.X ±0.3
.XX ±0.2
.XXX ±0.1

SCALE(比例):
FREE

REV:
R3

UNIT:
mm

SIZE:
A4

SHEET:
1/1

| REV | DESCRIPTION | DATE |
|-----|---------------------------------|--------------------------|
| R0 | RELEASE 變更環保章字樣 | 2006.07.04 2006.08.11 |
| R1 | 變更Drill尺寸 | 2007.05.15 |
| R2 | RELEASE 6061鋁合金停產 | 2009.07.17 2011.03.28 |
| R3 | 變更塑料: NSF-NGT, 圖面更新, 變更圖號 | 2013.05.14 |