
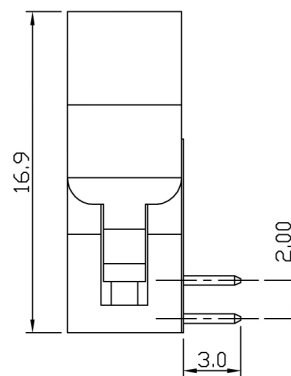
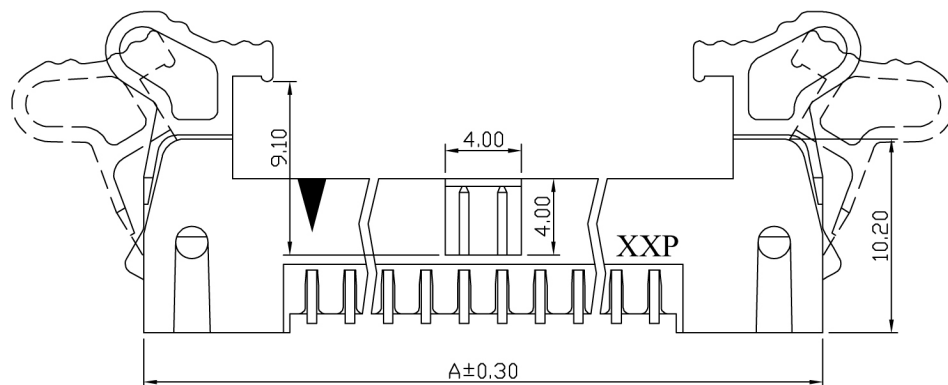


PCB Layout (Top View)

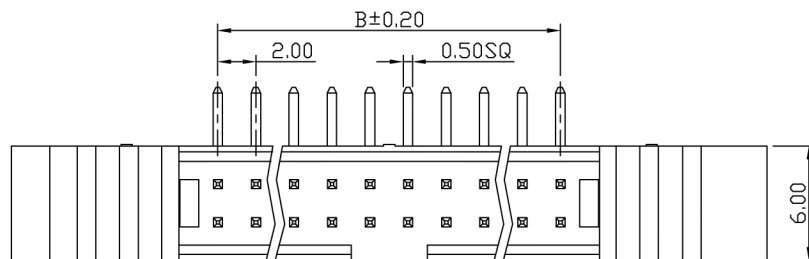

所有材料為  
"環保材料"  
2006.7.04  
RoHS

MATERIAL AND FINISH

Housing: Nylon-6T (UL94V-0), Black.  
Terminal: Brass, Gold Plating.

ELECTRICAL CHARACTERISTICS

Current Rating: 1.0 Amp. Max..  
Dielectric Withstand Voltage:  
800V AC RMS for 60Seconds.  
Insulation Resistance:  
1000M Ohms Min. at 500V DC.

MECHANICAL CHARACTERISTICS

Operating Temperature: -55°C ~ +105°C.

PART NO.	Dimensions	
	A	B
CHE200R010	25.70	8.00
CHE200R012	27.70	10.00
CHE200R014	29.70	12.00
CHE200R016	31.70	14.00
CHE200R020	35.70	18.00
CHE200R022	37.70	20.00
CHE200R024	39.70	22.00
CHE200R026	41.70	24.00
CHE200R030	45.70	28.00
CHE200R034	49.70	32.00
CHE200R040	55.70	38.00
CHE200R044	59.70	42.00
CHE200R050	65.70	48.00

DESCRIPTION(內容):  
2.00mm Box Header  
Ejector Type PCB Mount Right Angle  
with Short Latch  
PART NO:  
(料 號) CHE200R0XX  
DWG NO(圖號): HD22190426

DRAWN(製圖):  
KAY  
CHECKED(確認):  
MANDY  
APPROVAL(核准):  
JOHNNY

GENERAL TOLERANCE:  
(公差)  
.X ±03  
.XX ±02  
.XXX ±01  
SCALE(比例):  
FREE

REV:  
R3  
UNIT:  
mm  
SIZE:  
A4  
SHEET:  
1/1

REV	DESCRIPTION	DATE
R0	RELEASE 變更環保章字樣	2006.07.04 2006.08.11
R1	變更塑料: NBT-FRS 變更塑料: NBT-FRS & Dm尺寸	2006.09.29 2007.05.15
R2	RELEASE 604681n 停產	2009.07.17 2011.03.28
R3	變更塑料: NBT-NBT, 圖面更新, 變更圖號	2013.05.14