


PCB Layout (Top View)

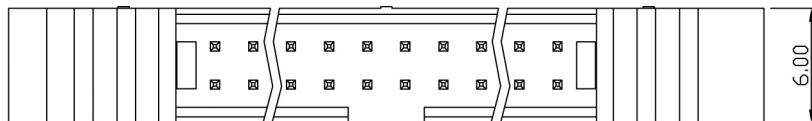

所有材料為
"環保材料"
2006.7.04
RoHS

MATERIAL AND FINISH



Housing: Nylon-6T (UL94V-0), Black.
Terminal: Brass, Gold Plating.

ELECTRICAL CHARACTERISTICS

Current Rating: 1.0 Amp. Max..
Dielectric Withstand Voltage:
800V AC RMS for 60Seconds.
Insulation Resistance:
1000M Ohms Min. at 500V DC.

MECHANICAL CHARACTERISTICS

Operating Temperature: -55°C ~ +105°C.

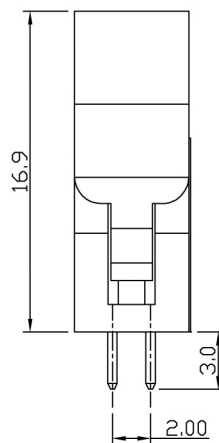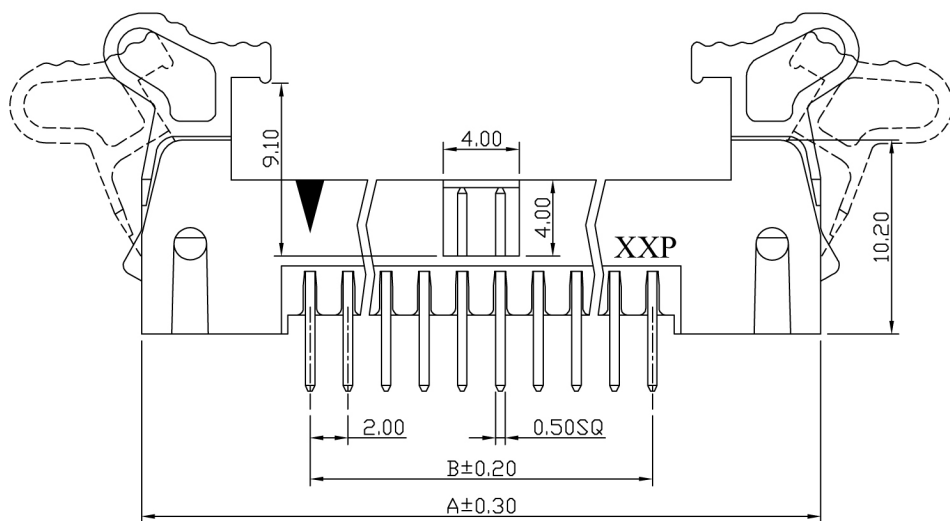

PART NO.	Dimensions	
	A	B
CHE200S010	25.70	8.00
CHE200S012	27.70	10.00
CHE200S014	29.70	12.00
CHE200S016	31.70	14.00
CHE200S020	35.70	18.00
CHE200S022	37.70	20.00
CHE200S024	39.70	22.00
CHE200S026	41.70	24.00
CHE200S030	45.70	28.00
CHE200S034	49.70	32.00
CHE200S040	55.70	38.00
CHE200S044	59.70	42.00
CHE200S050	65.70	48.00

DESCRIPTION(內容):
2.00mm Box Header Ejector Type
PCB Mount Vertical with Short Latch

PART NO:
(料號) CHE200S0XX

DWG NO(圖號): HD22170526

DRAWN(製圖):
KAY

CHECKED(確認):
MANDY

APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)
.X ±0.3
.XX ±0.2
.XXX ±0.1

SCALE(比例):
FREE

REV:
R3

UNIT:
mm

SIZE:
A4

SHEET:
1/1

REV	DESCRIPTION	DATE
R0	RELEASE 變更環保印章字樣	2006.07.04 2006.08.11
R1	變更塑料: NSE-FRS 變更塑料: NSE-FRS & DnA尺寸	2006.09.27 2007.05.15
R2	RELEASE 604681n 停產	2009.07.17 2011.03.28
R3	變更塑料: NSE-NSE, 圖面更新, 變更圖號	2013.05.14