
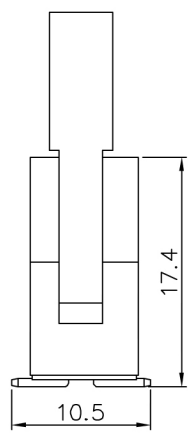


FBL layout (Top View)

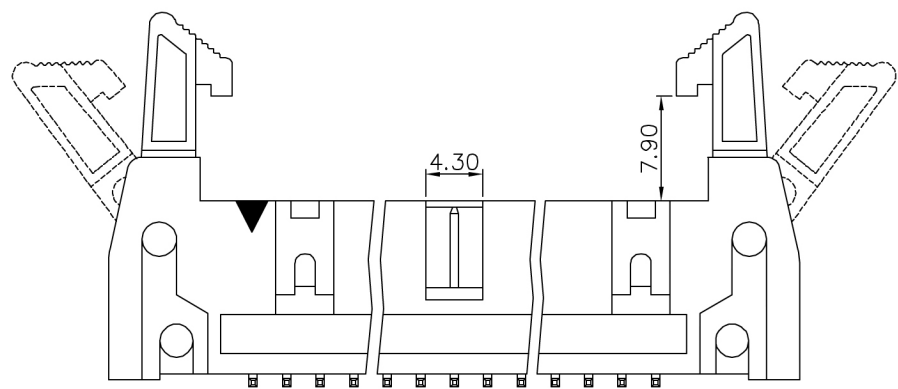

Material and Finish


1. Housing: Nylon-6T (UL94V-0), Black.
2. Terminal: Sq. 0.64mm Copper alloy, Gold Plating.

Electrical Characteristics

1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds.
3. Insulation Resistance: 1000M Ohms Min. at 1000V DC.

Mechanical Characteristics

1. Operating Temperature: -55 °C ~ +105 °C

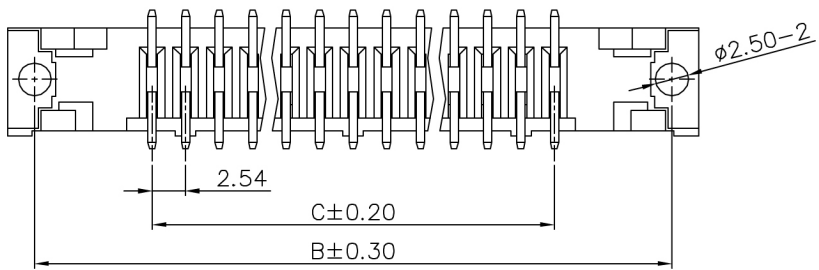

所有材料為
"環保材料"
2009.4.15
RoHS

PART NO.	Dimensions		
	A	B	C
CHE254010S	32.00	27.94	10.16
CHE254014S	37.08	33.02	15.24
CHE254016S	39.62	35.56	17.78
CHE254020S	44.70	40.64	22.86
CHE254026S	52.32	48.26	30.48

	DESCRIPTION(內容): 2.54mm Box Header Ejector PBC Surface Mount Type with Latch	DRAWN(製圖): MIMI	GENERAL TOLERANCE: (公差) .X ±0.3 .XX ±0.2 .XXX ±0.1	REV: R1	REV	DESCRIPTION	DATE
		CHECKED(確認): MANDY					
	PART NO: (料號) CHE2540XXS	APPROVAL(核准):	SCALE(比例): FREE	SIZE: A4	R1 34, 40, 50pin 停產 2011.01.21		
	DWG NO(圖號): HD2208012	JOHNNY		SHEET: 1/1	R2	R3	