

Recommended P.C.B. layout



所有材料為
"環保材料"
2009.7.16
RoHS

1. SPECIFICATIONS

- Current rating: 1Amp.
- Insulator resistance: 5000 Megohms min.
- Dielectric withstanding: AC 500V.
- Operating temperature: -40°C ~ +105°C.
- Max. processing: 260°C for 10 seconds.

2. MATERIAL

- Contact: Copper alloy.
- Insulator: Nylon 9T, UL 94V-0.
- Color: Black.
- Finish: Gold flash all over.

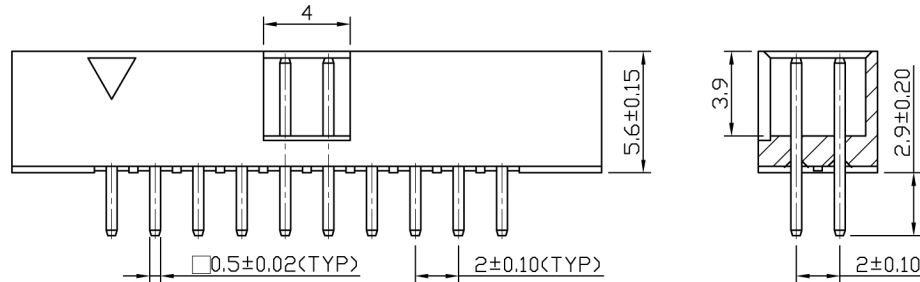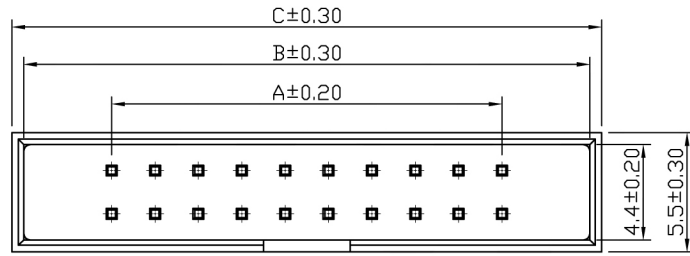

No. of contacts	Part No.	Dimensions			Remark
		A	B	C	
6P	CHEB200S006-CF1043	4.0	12.1	13.2	
8P	CHEB200S008-CF1043	6.0	14.1	15.2	
10P	CHEB200S010-CF1043	8.0	16.1	17.2	
12P	CHEB200S012-CF1043	10.0	18.1	19.2	
14P	CHEB200S014-CF1043	12.0	20.1	21.2	
16P	CHEB200S016-CF1043	14.0	22.1	23.2	
18P	CHEB200S018-CF1043	16.0	24.1	25.2	
20P	CHEB200S020-CF1043	18.0	26.1	27.2	
22P	CHEB200S022-CF1043	20.0	28.1	29.2	
24P	CHEB200S024-CF1043	22.0	30.1	31.2	
26P	CHEB200S026-CF1043	24.0	32.1	33.2	
28P	CHEB200S028-CF1043	26.0	34.1	35.2	
30P	CHEB200S030-CF1043	28.0	36.1	37.2	
32P	CHEB200S032-CF1043	30.0	38.1	39.2	
34P	CHEB200S034-CF1043	32.0	40.1	41.2	
36P	CHEB200S036-CF1043	34.0	42.1	43.2	
40P	CHEB200S040-CF1043	38.0	46.1	47.2	
44P	CHEB200S044-CF1043	42.0	50.1	51.2	
50P	CHEB200S050-CF1043	48.0	56.1	57.2	
60P	CHEB200S060-CF1043	58.0	66.1	67.2	
64P	CHEB200S064-CF1043	62.0	70.1	71.2	
68P	CHEB200S068-CF1043	66.0	74.1	75.2	

PART NO: (料號) CHEB200S0XX-CF1043	DESCRIPTION(內容): Pitch 2.0 box header (straight angle type-2.9)	DRAWN(製圖): KAY	GENERAL TOLERANCE: (公差) X ±0.15 .X ±.3 .XX ±0.10 .XXX ±0.08 .X ±.1	REV: R1	REV	DESCRIPTION	DATE
		CHECKED(確認): MANDY		UNIT: mm	R0		
	DWG NO(圖號):	APPROVAL(核准): JOHNNY	SCALE(比例): FREE	SIZE: A4	R1	第 38 46 48 54 56 62 in 停產	2013.04.15
				SHEET: 1/1	R2 R3		