

Recommended P.C.B. layout




所有材料為
"環保材料"
2009.7.28
RoHS

1. SPECIFICATIONS

Current rating: 1Amp.
Insulator resistance: 5000 Megohms min.
Dielectric withstanding: AC 500V.
Operating temperature: -40°C ~ +105°C.
Max. processing: 260°C for 10 seconds.

2. MATERIAL

Contact: Copper alloy.
Insulator: Nylon 6T, UL 94V-0.
Color: Black.
Finish: Gold flash all over.

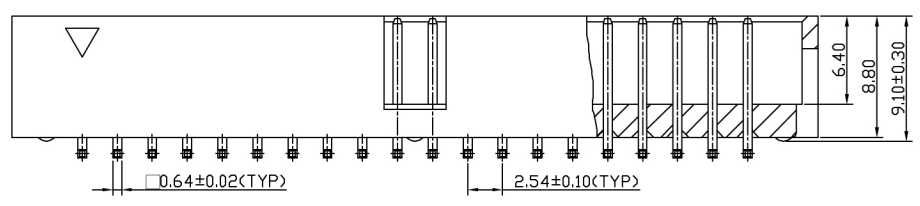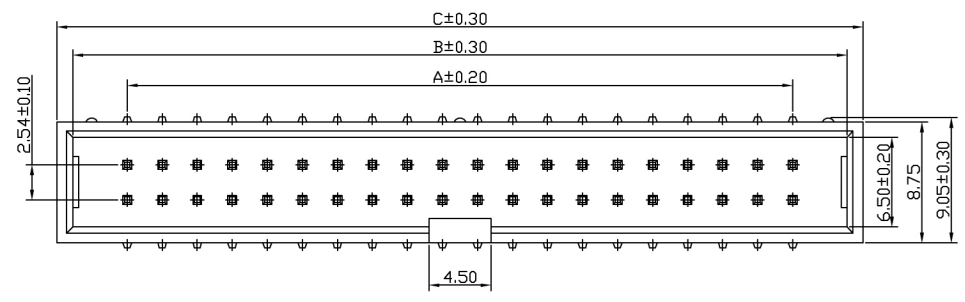

No. of contacts	Part No.	Dimensions			Remark
		A	B	C	
6P	CHEB254006S-CF1043	5.08	12.94	15.24	
8P	CHEB254008S-CF1043	7.62	15.48	17.78	
10P	CHEB254010S-CF1043	10.16	18.02	20.32	
12P	CHEB254012S-CF1043	12.70	20.56	22.86	
14P	CHEB254014S-CF1043	15.24	23.10	25.40	
16P	CHEB254016S-CF1043	17.18	25.64	27.94	
20P	CHEB254020S-CF1043	22.86	30.72	33.02	
24P	CHEB254024S-CF1043	27.94	35.80	38.10	
26P	CHEB254026S-CF1043	30.48	38.34	40.64	
30P	CHEB254030S-CF1043	35.56	43.42	45.72	
34P	CHEB254034S-CF1043	40.64	48.50	50.80	
40P	CHEB254040S-CF1043	48.26	56.12	58.42	
44P	CHEB254044S-CF1043	53.34	61.20	63.50	
50P	CHEB254050S-CF1043	60.96	68.82	71.12	
60P	CHEB254060S-CF1043	73.66	81.52	83.82	
64P	CHEB254064S-CF1043	78.74	86.60	88.90	

PART NO: (料號) CHEB2540 <u>XXS</u> -CF1043 DWG NO(圖號):	DESCRIPTION(內容): Pitch 2.54 box header (SMT type-9.5)	DRAWN(製圖): KAY	GENERAL TOLERANCE: (公差) .X ±0.15 .X ±.3 .X ±0.10 .XX ±0.05 .XXX ±0.08 .X ±1	REV: R1	REV	DESCRIPTION	DATE
		CHECKED(確認): MANDY		UNIT: mm	R0	RELEASE	2009.07.28
		APPROVAL(核准): JOHNNY	SCALE(比例): FREE	SIZE: A4	R1	增加第 4 版 23 32 版 產	2011.10.04
				SHEET: 1/1	R2 R3		