

Recommended P.C.B. layout




所有材料為
「環保材料」
2009.7.16
RoHS

1. SPECIFICATIONS

- Current rating: 1Amp.
- Insulator resistance: 5000 Megohms min.
- Dielectric withstanding: AC 500V.
- Operating temperature: -40 ° ~ +105 °C.
- Max.processing: 230 °C for 10 seconds.

2. MATERIAL

- Contact: Copper alloy.
- Insulator: PBT, UL 94V-0.
- Color: Black.
- Finish: Gold flash all over.

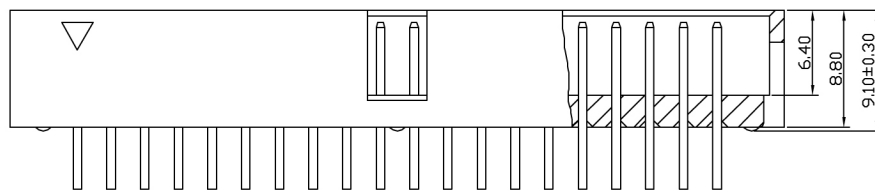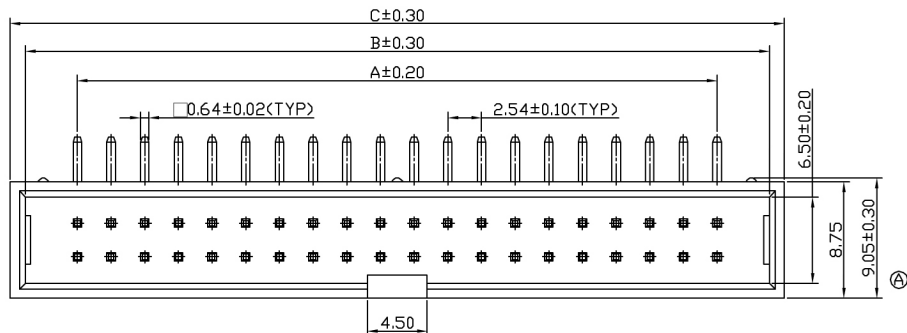

No. of contacts	Part No.	Dimensions			Remark
		A	B	C	
6P	CHEB254R006-CF1043	5.08	12.94	15.24	
8P	CHEB254R008-CF1043	7.62	15.48	17.78	
10P	CHEB254R010-CF1043	10.16	18.02	20.32	
12P	CHEB254R012-CF1043	12.70	20.56	22.86	
14P	CHEB254R014-CF1043	15.24	23.10	25.40	
16P	CHEB254R016-CF1043	17.18	25.64	27.94	
20P	CHEB254R020-CF1043	22.86	30.72	33.02	
24P	CHEB254R024-CF1043	27.94	35.80	38.10	
26P	CHEB254R026-CF1043	30.48	38.34	40.64	
30P	CHEB254R030-CF1043	35.56	43.42	45.72	
34P	CHEB254R034-CF1043	40.64	48.50	50.80	
40P	CHEB254R040-CF1043	48.26	56.12	58.42	
44P	CHEB254R044-CF1043	53.34	61.20	63.50	
50P	CHEB254R050-CF1043	60.96	68.82	71.12	
60P	CHEB254R060-CF1043	73.66	81.52	83.82	
64P	CHEB254R064-CF1043	78.74	86.60	88.90	

PART NO: (料號) CHEB254R0 XX-CF1043 DWG NO(圖號):	DESCRIPTION(內容): Pitch 2.54 box header (right angle type-3.1)	DRAWN(製圖): KAY	GENERAL TOLERANCE: (公差) .X ±0.15 .X ±.3 .XX ±0.10 .XXX ±0.05 .X ±.08 .X ±1	REV: R2	REV	DESCRIPTION	DATE	
		CHECKED(確認): MANDY		UNIT: mm	R0			RELEASE
			APPROVAL(核准): JOHNNY	SCALE(比例): FREE	SIZE: A4	R1	增加 4PIN 23 32PIN 零件	2011.10.03
					SHEET: 1/1	R2	修正 ① 尺寸	2012.04.27
					R3			