

Recommended P.C.B. layout



所有材料為  
「環保材料」  
2009.7.28  
RoHS

1. SPECIFICATIONS

Current rating: 1Amp.  
Insulator resistance: 5000 Megohms min.  
Dielectric withstanding: AC 500V.  
Operating temperature: -40°C ~ +105°C.  
Max. processing: 230°C for 10 seconds.

2. MATERIAL

Contact: Copper alloy.  
Insulator: PBT, UL 94V-0.  
Color: Black.  
Finish: Gold flash all over.

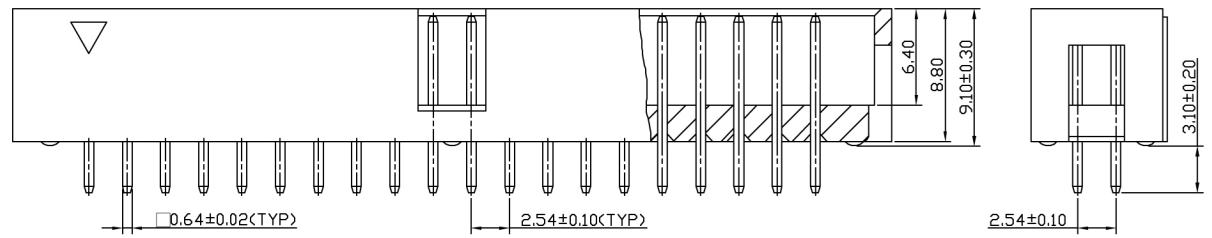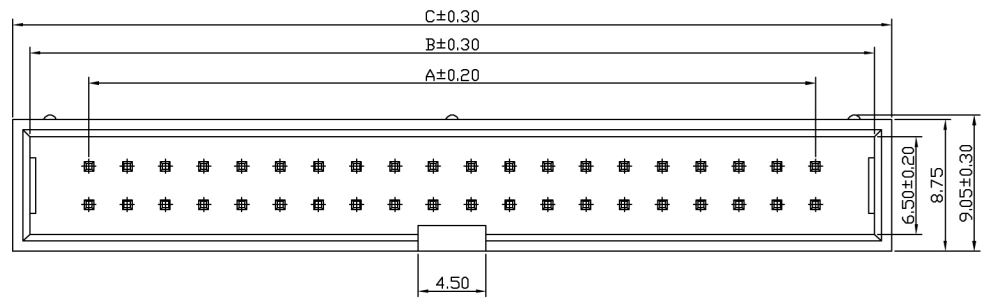

No. of contacts	Part No.	Dimensions			Remark
		A	B	C	
6P	CHEB254S006-CF1043	5.08	12.94	15.24	
8P	CHEB254S008-CF1043	7.62	15.48	17.78	
10P	CHEB254S010-CF1043	10.16	18.02	20.32	
12P	CHEB254S012-CF1043	12.70	20.56	22.86	
14P	CHEB254S014-CF1043	15.24	23.10	25.40	
16P	CHEB254S016-CF1043	17.18	25.64	27.94	
20P	CHEB254S020-CF1043	22.86	30.72	33.02	
24P	CHEB254S024-CF1043	27.94	35.80	38.10	
26P	CHEB254S026-CF1043	30.48	38.34	40.64	
30P	CHEB254S030-CF1043	35.56	43.42	45.72	
34P	CHEB254S034-CF1043	40.64	48.50	50.80	
40P	CHEB254S040-CF1043	48.26	56.12	58.42	
44P	CHEB254S044-CF1043	53.34	61.20	63.50	
50P	CHEB254S050-CF1043	60.96	68.82	71.12	
60P	CHEB254S060-CF1043	73.66	81.52	83.82	
64P	CHEB254S064-CF1043	78.74	86.60	88.90	

DESCRIPTION(內容): Pitch 2.54 box header ( straight type -3.1 )  PART NO: (料號) CHEB254S0 XX-CF1043 DWG NO(圖號):	DRAWN(製圖): KAY CHECKED(確認): MANDY APPROVAL(核准): JOHNNY	GENERAL TOLERANCE: (公差) X ±0.15 X. ±3 .X ±0.10 .XX ±0.05 .XXX ±0.03 .X ±1  SCALE(比例): FREE	REV: R1 UNIT: mm SIZE: A4 SHEET: 1/1	REV: R0 R1 R2 R3	DESCRIPTION RELEASE 第 23 331# 生產	DATE 2009.07.28 2011.10.04	