



A

B

C

D

E

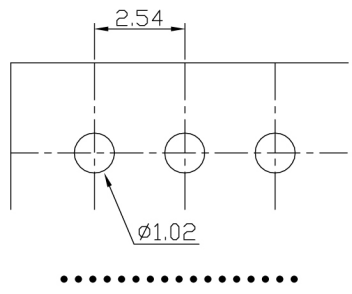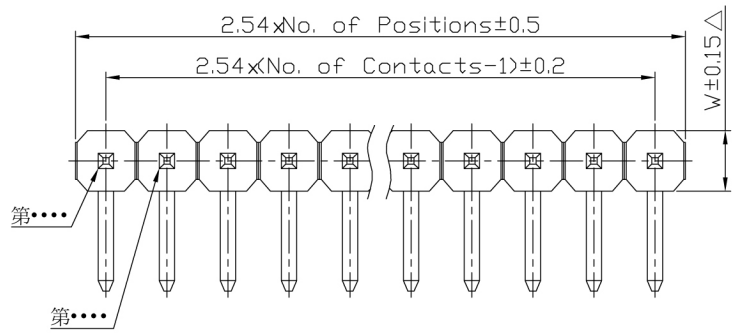

Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms Min.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0

Finish: Tin, Gold Plated
 Standard: Gold Flash all over

1


1

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P10X</u>	- <u>X</u>	<u>X</u>	<u>X</u>	<u>A</u> / <u>B</u>	- <u>XX</u>
(Pin Header Single Row)	R: Right Angle Type (Down Angle Type) R1: 1.5mm	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold I: 30U" Gold (Standard: G)	P: PBT N: Nylon-6T	A (060) B (030) (If you desire on other length, by marking put desired in the A/B) (Standard: 060/030)	(02 TO 40 Contacts)

2

2

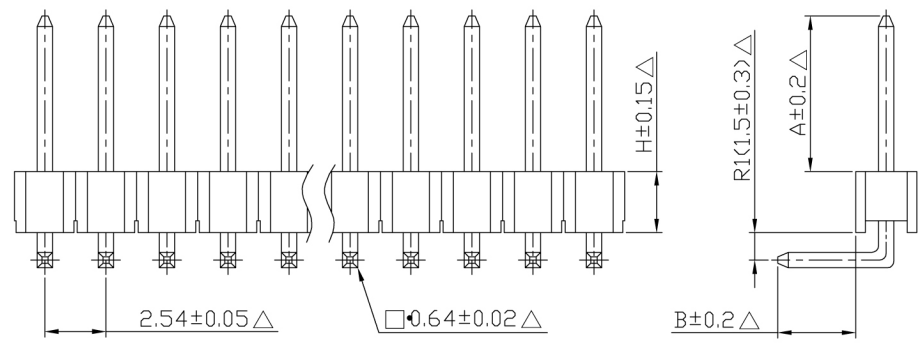

Selectivity:

- P101 (H: 2.54 W: 2.54) (Material (Standard): PBT)
- P102 (H: 1.7 W: 2.54) (Material: Nylon-6T)
- P103 (H: 1.5 W: 2.54) (Material: Nylon-6T)

Dim(6.0/3.0):

A: _____ B: _____

3

3

•△此符號表示重點管控尺寸

	DESCRIPTION(內容)	DRAWN(製圖)	GENERAL TOLERANCE: (公差)	REV: R0	REV	DESCRIPTION	DATE
	2.54mm Pin Header 90° □=0.64	CHECKED(確認)	.X .XXXX .XX .X° .XXX .XX°	UNIT: mm	R0		
	PART NO: (料號)	APPROVAL(核准)	SCALE(比例): 1:XX	A4 SHEET	R1		
	DWG NO(圖號)			1/1	R2		
					R3		

A

B

C

D

E