


P. C. B Hole Layout

Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms Min.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0

Finish: Tin, Gold Plated
Standard: Gold Flash all over

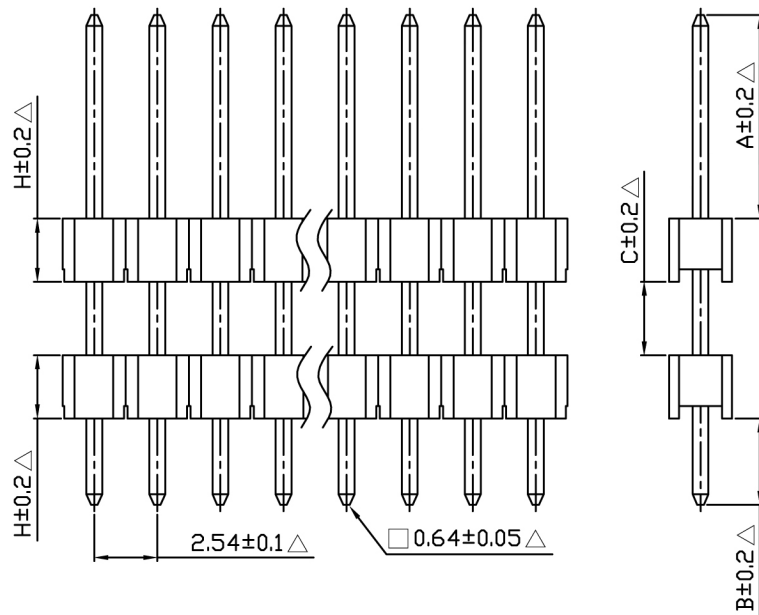

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P12X</u>	- <u>X</u>	<u>X</u>	<u>X</u> -	<u>A</u> / <u>C</u> / <u>B</u>	- <u>X</u> <u>X</u>
(Pin Header Single Row)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold I: 30U" Gold (Standard: G)	P: PBT N: Nylon-6T	A (060) C (030) B (030) (If you desire on other length, by marking put desired in the A/C/B) (Standard: 060/000/030)	(02 TO 40 Contacts)

Selectivity:

- P121 (H: 2.54 W: 2.54) (Material (Standard): PBT)
- P122 (H: 1.7 W: 2.54) (Material: Nylon-6T)
- P123 (H: 1.5 W: 2.54) (Material: Nylon-6T)

Dim(6.0/3.0/3.0):

A: _____ C: _____ B: _____

△ 此符號表示重點控管尺寸

	DESCRIPTION(內容): 2.54mm Pin Header 180° □=0.64 雙塑單排	DRAWN(製圖):	GENERAL TOLERANCE: (公差)	REV: A1	REV	DESCRIPTION	DATE
	PART NO: (料號)	CHECKED(確認):	X. ±0.30 X. ° ±5.0° .X ±0.20 .X ° ±3.0° .XX ±0.15 .XX ° ±1.0°	UNIT: mm	1		
	DWG NO(圖號):	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	2		
				SHEET: 1/1	3		
					4		