
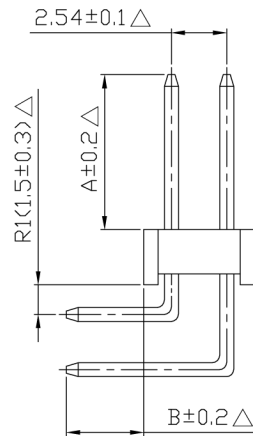


P.C.B Hole Layout

### Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms Min.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0

Finish: Tin, Gold Plated  
Standard: Gold Flash all over

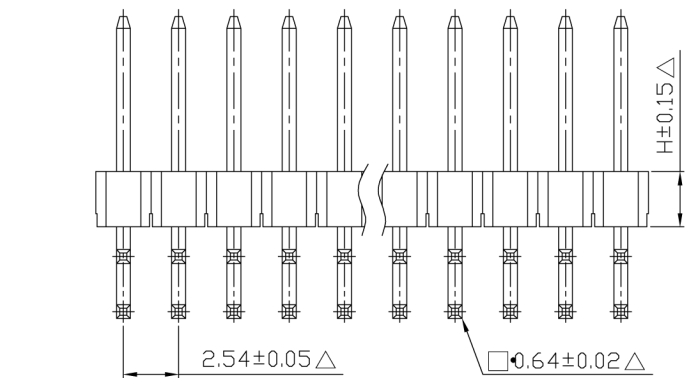

### How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P20X</u>	- X	X	X	A / B	X X
(Pin Header Dual Row)	R: Right Angle Type (Down Angle Type) R1: 1.5mm	G: Gold Flash T: Tin Plated A: 10U°Gold B: 15U°Gold C: 20U°Gold I: 30U°Gold (Standard: G)	P: PBT N: Nylon-6T	A (060) B (030)	(04 TO 80 Contacts)

(If you desire on other length, by marking put desired in the A/B)  
(Standard: 060/030)

### Selectivity:

- P201 (H: 2.54 W: 5.08) (Material (Standard): PBT)
- P202 (H: 1.7 W: 5.08) (Material: Nylon-6T)
- P203 (H: 1.5 W: 5.08) (Material: Nylon-6T)

### Dim(6.0/3.0):

A: \_\_\_\_\_ B: \_\_\_\_\_

•△•此符號表示重點管控尺寸

	DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE(公差):	REV: <b>R0</b>	REV	DESCRIPTION	DATE
	<b>2.54mm Pin Header 90° □=0.64</b>	CHECKED(確認):	.X .XXXX .XX .X° .XXX .XX°	UNIT: <b>mm</b>	<b>R0</b>		
	PART NO: (料號)	APPROVAL(核准):	SCALE(比例): 1:XX	A4 SHEET: <b>1/1</b>	<b>R1</b>		
	DWG NO(圖號):				<b>R2</b>		
				<b>R3</b>			