

P.C.B Hole Layout

Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms Min.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40 °C ~ +105 °C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0

Finish: Tin, Gold Plated
Standard: Gold Flash all over

How to order


Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P20X</u>	- <u>X</u>	<u>X</u>	<u>X</u> -	<u>A / B</u>	- <u>X X</u>
(Pin Header Dual Row)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold I: 30U" Gold (Standard: G)	P: PBT N: Nylon-6T	A / B (060) / (030)	(04 TO 80 Contacts)
					(If you desire on other length, by marking put desired in the A/B) (Standard: 060/030)

Selectivity:

- P201 (H: 2.54 W: 5.08) (Material (Standard): PBT)
- P202 (H: 1.7 W: 5.08) (Material: Nylon-6T)
- P203 (H: 1.5 W: 5.08) (Material: Nylon-6T)

Dim(6.0/3.0):

A: _____ B: _____

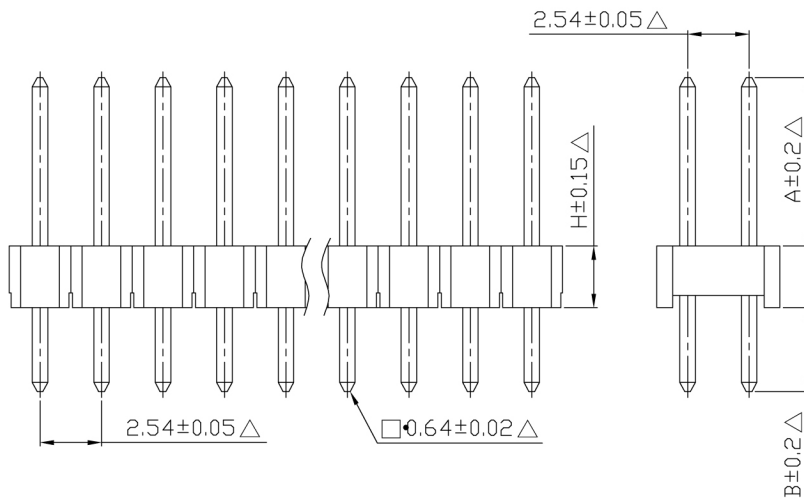

△此符號表示重點管控尺寸

	DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE(公差):	REV: R0	REV	DESCRIPTION	DATE
	2.54mm Pin Header 180° □=0.64	CHECKED(確認):	.X .XXXX .XX .X° .XXX .XX°	UNIT: mm	R0		
	PART NO: (料號)	APPROVAL(核准):	SCALE(比例): 1:XX	A4 SHEET: 1/1	R1		
	DWG NO(圖號):				R2		
					R3		