


### Specifications

Current Rating	: 3 Amps
Insulator Resistance	: 5000 Megohms Min.
Dielectric Withstanding	: AC 1000 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0

Finish: Tin, Gold Plated  
Standard: Gold Flash all over

1

1

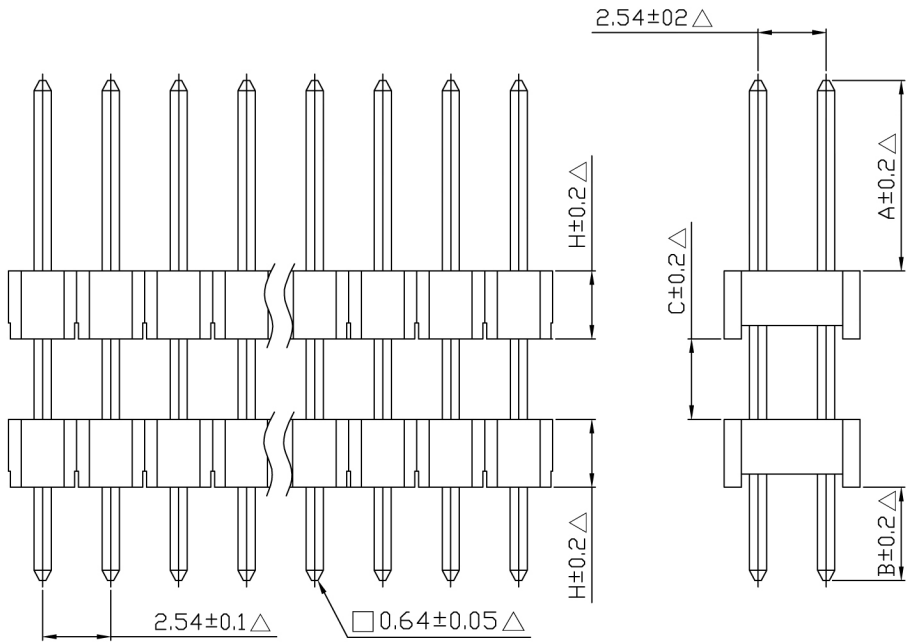

### How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P22X</u>	- <u>X</u>	<u>X</u>	<u>X</u> -	<u>A</u> / <u>C</u> / <u>B</u>	- <u>X</u> <u>X</u>
(Pin Header Dual Row)	S: Straigh Type	G: Gold Flash T: Tin Plated A: 10U*Gold B: 15U*Gold C: 20U*Gold I: 30U*Gold (Standard: G)	P: PBT N: Nylon-6T	A (060) C (030) B (030) (If you desire on other length, by marking put desired in the A/C/B) (Standard: 060/000/030)	(04 TO 80 Contacts)

### Selectivity:

- P221 (H: 2.54 W: 5.08) (Material (Standard): PBT)
- P222 (H: 1.7 W: 5.08) (Material: Nylon-6T)
- P223 (H: 1.5 W: 5.08) (Material: Nylon-6T)

### Dim(6.0/3.0/3.0):

A: \_\_\_\_\_ C: \_\_\_\_\_ B: \_\_\_\_\_.

△ 此符號表示重點控管尺寸

3

3

	DESCRIPTION(內容): <b>2.54mm Pin Header 180° □=0.64</b> 雙塑雙排	DRAWN(製圖):	GENERAL TOLERANCE: (公差)	REV: <b>A1</b>	REV	DESCRIPTION	DATE
	PART NO: (料號)	CHECKED(確認):	X. ±0.30 X.° ±5.0° .X ±0.20 .X° ±3.0° .XX ±0.15 .XX° ±1.0°	UNIT: <b>mm</b>			
	DWG NO(圖號):	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: <b>A4</b>			
				SHEET: <b>1/1</b>			