

P. C. B Hole Layout

Specifications

Current Rating	: 2 Amps
Insulator Resistance	: 3000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0

Finish: Tin, Gold Plated
Standard: Gold Flash all over

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P30X</u>	- <u>X</u>	<u>X</u>	<u>X</u> -	<u>A</u> / <u>B</u>	- <u>XX</u>
(Pin Header Single Row)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold I: 30U" Gold (Standard: G)	P: PBT N: Nylon-6T	A (040) B (028)	(02 TO 40 Contacts)


(If you desire on other length, by marking put desired in the A/B)
(Standard: 040/028)

Selectivity:

- P301 (H: 2.0 W: 2.0) (Material (Standard): PBT)
- P302 (H: 1.5 W: 2.0) (Material: Nylon-6T)

Dim(4.0/2.8):

A: _____ B: _____

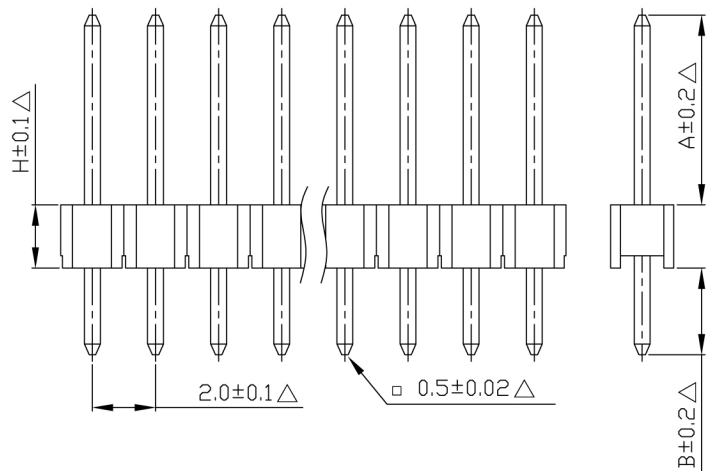

△ 此符号表示重点控管尺寸

	DESCRIPTION(内容):	DRAWN(製圖):	GENERAL TOLERANCE:(公差):	REV: R1	REV	DESCRIPTION	DATE
	2.0mm Pin Header 180° □=0.5	CHECKED(確認):	.X .XXXX .XX .X° .XXX .XX°	UNIT: mm	R0		
		PART NO: (料號):	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	R1	
	DWG NO(圖號):			SHEET 1/1	R2		
				R3			