



A

B

C

D

E

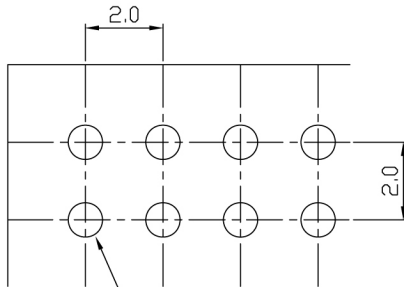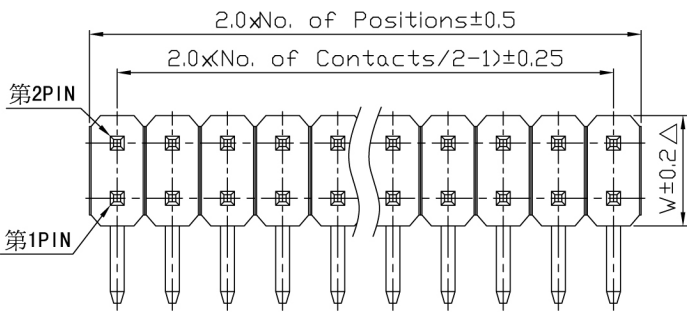

P.C.B Hole Layout

Specifications

Current Rating	: 2 Amps
Insulator Resistance	: 3000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0

Finish: Tin, Gold Plated
 Standard: Gold Flash all over

1

1

2

2

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P40X</u>	- <u>X</u>	<u>X</u>	<u>X</u> -	<u>A</u> / <u>B</u>	- <u>XX</u>
(Pin Header Dual Row)	R: Right Angle Type R2: 1.0mm	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold I: 30U" Gold (Standard: G)	P: PBT N: Nylon-6T	A (040) B (028)	(04 TO 80 Contacts)


(If you desire on other length, by marking put desired in the A/B)
(Standard: 040/028)

Selectivity:

- P401 (H: 2.0 W: 4.0) (Material (Standard): PBT)
- P402 (H: 1.5 W: 4.0) (Material: Nylon-6T)

Dim(4.0/2.8):

A: _____ B: _____

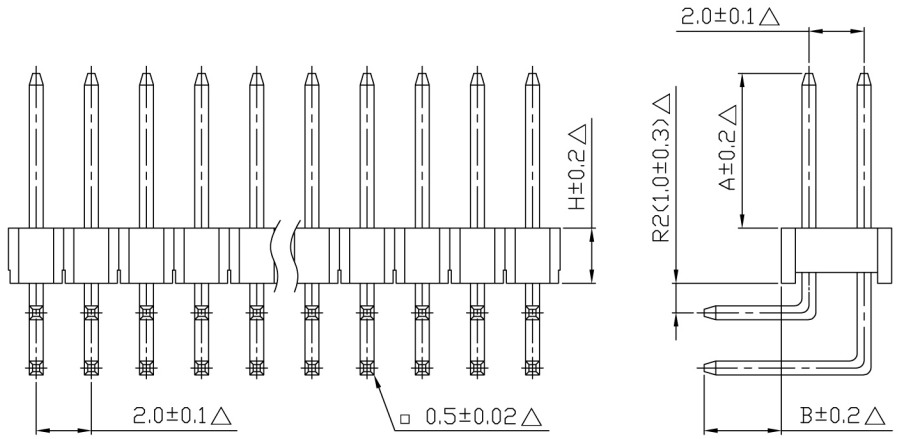

△ 此符號表示重點管控尺寸

3

3

	DESCRIPTION(內容):	DRAWN(製圖)	GENERAL TOLERANCE:(公差)	REV: R1	REV	DESCRIPTION	DATE
	2.0mm Pin Header 90° □=0.5	CHECKED(確認):	.X .XXXX .XX .X° .XXX .XX°	UNIT: mm	R0		
	PART NO: (料號)	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	R1		102.09.27
	DWG NO(圖號):			SHEET 1/1	R2		
				R3			

A

B

C

D

E