
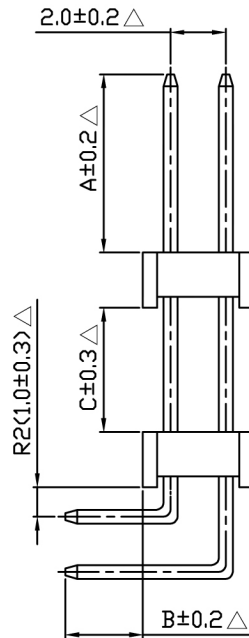


P.C.B Hole Layout

Specifications

Current Rating	: 2 Amps
Insulator Resistance	: 3000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0

Finish: Tin, Gold Plated
Standard: Gold Flash all over

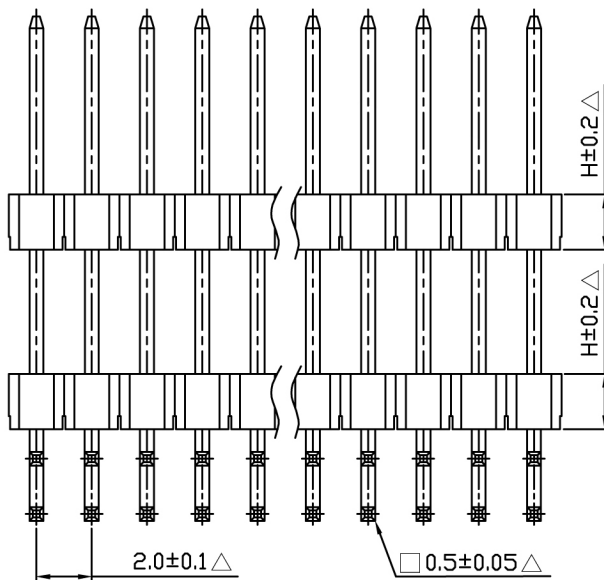

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P42X	X	X	X -	A / C / B	X X
(Pin Header Dual Row)	R: Right Angle Type (Down Angle Type) R2: 1.0mm	G: Gold Flash T: Tin Plated A: 10U Gold B: 15U Gold C: 20U Gold I: 30U Gold (Standard: G)	P: PBT N: Nylon-6T	A (040) C (000) B (028) (If you desire on other length, by marking put desired in the A/B) (Standard: 040/000/028)	(04 TO 80 Contacts)

Selectivity:

- P421 (H: 2.0 W: 4.0) (Material (Standard): PBT)
- P422 (H: 1.5 W: 4.0) (Material: Nylon-6T)

Dim(4.0/0.0/2.8):

A: _____ C: _____ B: _____

△ 此符號表示重點管控尺寸

	DESCRIPTION(內容): 2.0mm Pin Header 90° □=0.5 雙塑雙排	DRAWN(製圖):	GENERAL TOLERANCE: (公差)	REV: A/1	REV	DESCRIPTION	DATE
	PART NO: (料號)	CHECKED(確認):	X. ±0.30 X.° ±5.0° .X ±0.20 .X° ±3.0° .XX ±0.15 .XX° ±1.0°	UNIT: mm	1		
	DWG NO(圖號):	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	2		
				SHEET: 1/1	3		
					4		