
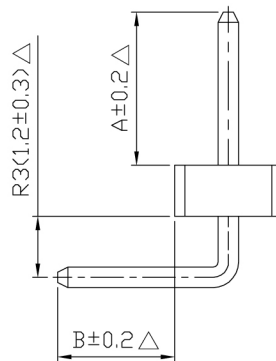


P. C. B Hole Layout

Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Copper Alloy
Insulator Material	:Polyester, UL 94V-0
Standard	:Nylon-6T
Finish	:Gold Plated
Standard	:Gold Flash all over

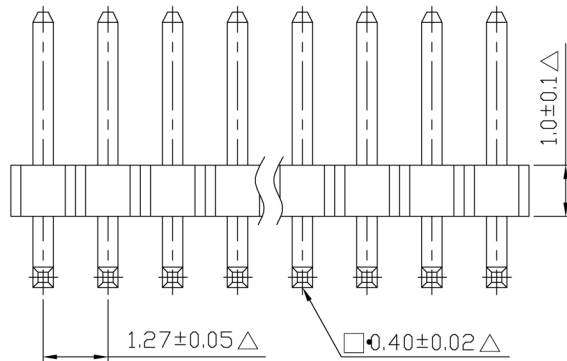

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P505</u>	- <u>X</u>	<u>X</u>	<u>X</u>	- <u>A / B</u>	- <u>X X</u>
(Pin Header Single Row) P505 (H:1.0 W:2.1)	R:Right Angle Type (Down Angle Type) R3:1.2mm :	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold I:30U"Gold (Standard:G)	N:Nylon-6T (Standard:N)	A B (030) (023)	(02 TO 50 Contacts)
				(If you desire on other length, by marking put desired in the A/B)	

Dim(3.0/2.3):

A: _____ B: _____

△·此符號表示重點管控尺寸

DESCRIPTION(內容) 1.27mm Pin Header H:1.0 90° □=0.40 Nylon-6T	DRAWN(製圖)	GENERAL TOLERANCE: (公差)	REV: R0	REV	DESCRIPTION	DATE
	CHECKED(確認)	.X .XXXX .XX .X° .XXX .XX°	UNIT: mm	R0		
	PART NO: (料號)	SCALE(比例):	A4	R1		
	DWG NO(圖號):	1:XX	SHEET 1/1	R2		
			R3			