



A

B

C

D

E

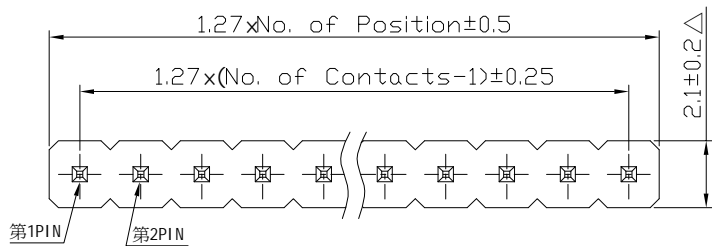

P.C.B Hole Layout



Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P505	X	X	X	A / B	XX
(Pin Header Single Row) P505(H: 1.0)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold I: 30U"Gold (Standard: G)	N: Nylon-6T (Standard: N)	A (030) B (023)	(02 TO 50 Contacts)

(If you desire on other length, by marking put desired in the A/B)

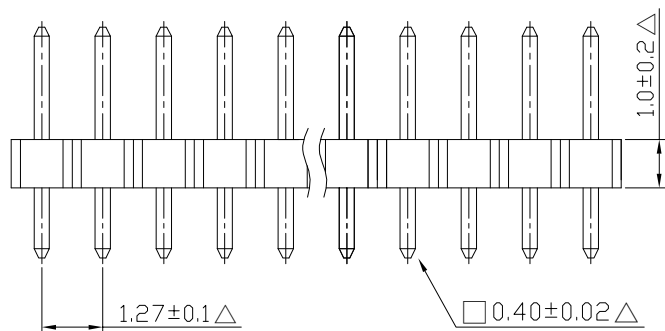

Dim(3.0/2.3):

A: _____ B: _____

 Δ 此符號表示重點管控尺寸

DESCRIPTION(內容):

1.27mm Pin Header H:1.0 180° $\square = 0.40$
Nylon-6T

PART NO:

(料號)

DWG NO(圖號):

DRAWN(製圖):

CHECKED(確認):

APPROVAL(核准):

GENERAL TOLERANCE:
(公差).X .XXXX
.XX .X°
.XXX .XX°SCALE(比例):
1:XX

REV:

R0

UNIT:

mm

SIZE:

A4

SHEET:

1/1

REV

R0

R1

R2

R3

DESCRIPTION

DATE

A

B

C

D

E