


P. C. B Hole Layout

Specifications

Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

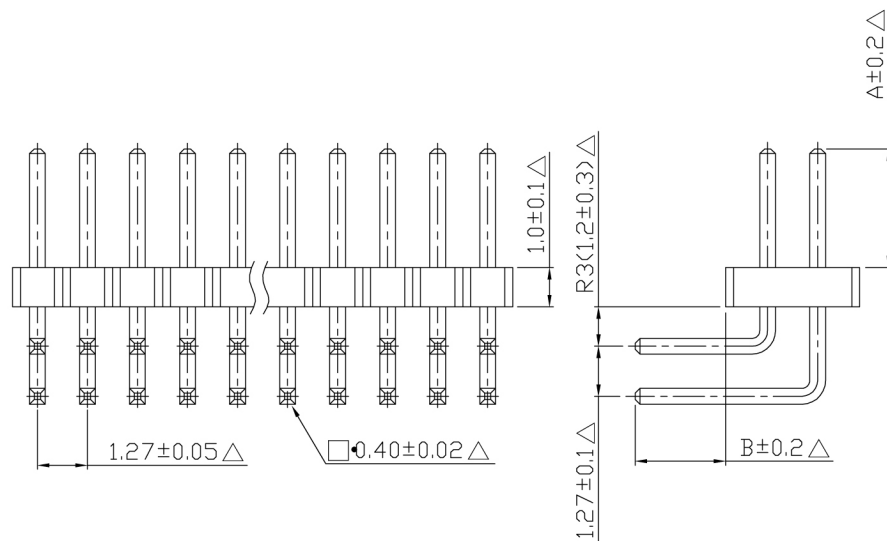

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P605	- X	X	X -	A / B	X X
(Pin Header Dual Row) P605 (H: 1.0 W: 3.4)	R: Right Angle R3: 1.2mm	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold I: 30U"Gold (Standard: G)	N: Nylon-6T (Standard: N)	A B (030) (023)	(04 TO 100 Contacts)
				(If you desire on other length, by marking put desired in the A/B)	

Dim(3.0/2.3) :

A: _____ B: _____

△此符号表示重點管控尺寸

DESCRIPTION(內容)	DRAWN(製圖)	GENERAL TOLERANCE:(公差)	REV: R0	REV	DESCRIPTION	DATE
	1.27mm Pin Header H:1.0 90° □=0.40 Nylon-6T	CHECKED(確認)	.X .XXX .XX .X° .XXX .XX°	UNIT: mm	R0	
PART NO:(料號)		APPROVAL(核准)	SIZE: A4	R1		
DWG NO(圖號)	SCALE(比例): 1:XX	⊕	SHEET: 1/1	R2		
				R3		