



A

B

C

D

E

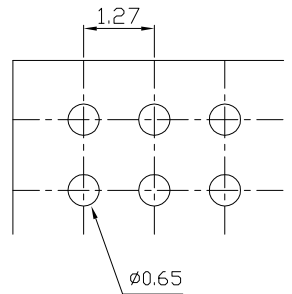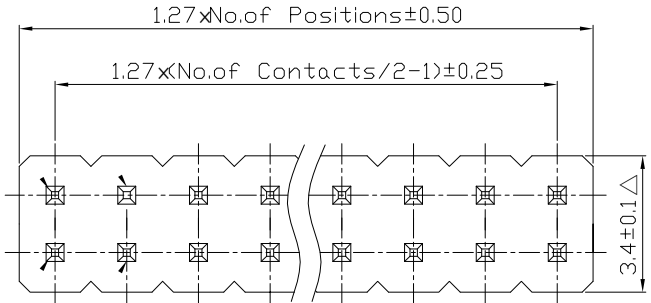

P.C.B Hole Layout

### Specifications


Current Rating	: 1 Amp
Insulator Resistance	: 1000 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40 °C ~ +105 °C
Contact Material	: Copper Alloy
Insulator Material	: Polyester, UL 94V-0
Standard	: Nylon-6T
Finish	: Gold Plated
Standard	: Gold Flash all over

1

1

2

2

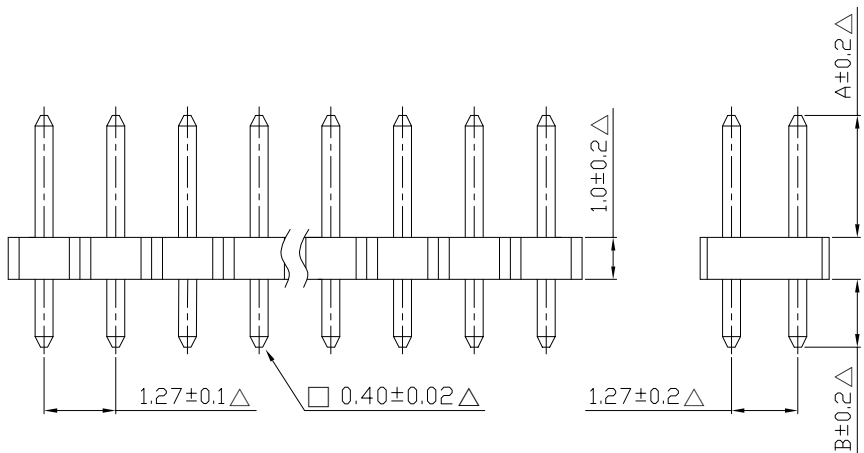

### How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<b>P605</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>A / B</b>	<b>XX</b>
(Pin Header Dual Row) P605(H: 1.0)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold I: 30U"Gold (Standard: G)	N: Nylon-6T (Standard: N)	A (030) B (023) (If you desire on other length, by marking put desired in the A/B)	(04 TO 100 Contacts)

### Dim(3.0/2.3):

A: \_\_\_\_\_ B: \_\_\_\_\_

3

3

DESCRIPTION(内容): <b>1.27mm Pin Header H:1.0 180° □=0.40 Nylon-6T</b>	DRAWN(製圖):	GENERAL TOLERANCE:(公差)	REV: R0	REV	DATE
	CHECKED(確認):	.X .XXXX .XX .X° .XXX .XX°	UNIT: mm	R0	
PART NO: (料 號)	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	R1	
DWG NO(圖號):			SHEET: 1/1	R2	
				R3	

A

B

C

D

E