


P.C.B Hold Layout

Specifications

Current Rating	: 0.8 Amp
Insulator Resistance	: 900 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Material	: Brass
Insulator Material	: High Temperature Thermoplastic. UL 94V-0
Standard	: Nylon-6T
Finish	: Tin, Gold Plated
Standard	: Gold Flash all over

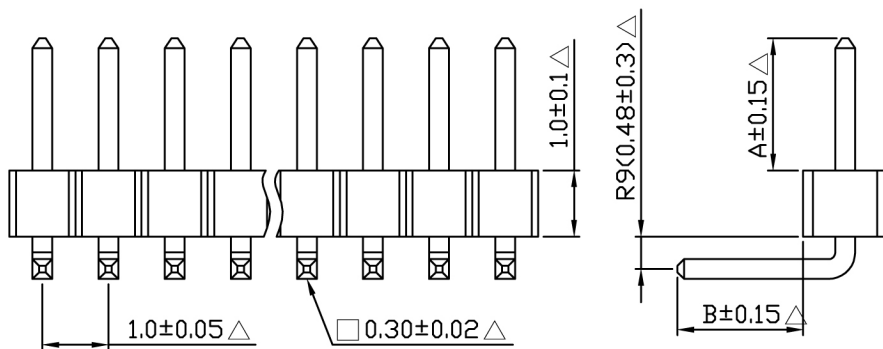

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P702</u>	- <u>X</u>	<u>X</u>	<u>X</u>	- <u>A / B</u>	- <u>X X</u>
(Pin Header Single Row) P702 (H: 1.0 W: 1.27)	R: Right Angle Type (Down Angle Type) R9: 0.48mm	G: Gold Flash T: Tin Plated A: 10 μ Gold B: 15 μ Gold C: 20 μ Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T (Standard: N)	A (020) B (019)	(01 TO 50 Contacts)

(If you desire on other length, by marking put desired in the A/B)

Dim(2.0/1.9) :

A: _____ B: _____

DESCRIPTION(内容): 1.0mm Pin Header H:1.0 90° □=0.30 Nylon-6T	DRAWN(製圖):	GENERAL TOLERANCE: (公差)	REV: A/1	REV	DESCRIPTION	DATE
	CHECKED(確認):	X. ±0.30 X.° 1/5.0' .X .0.20 .X.° 1/3.0' .XX .0.15 .XX.° 1/4.0'	UNIT: mm	1		
PART NO: (料 號)	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	2		
DWG NO(圖號):			SHEET: 1/1	3		
				4		