
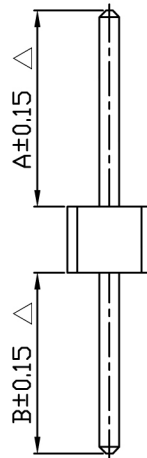


P.C.B Hold Layout

### Specifications

Current Rating	:0.8 Amp
Insulator Resistance	:900 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:High Temperature Thermoplastic. UL 94V-0
Standard Finish	:Nylon-6T
Standard	:Tin, Gold Plated
	:Gold Flash all over

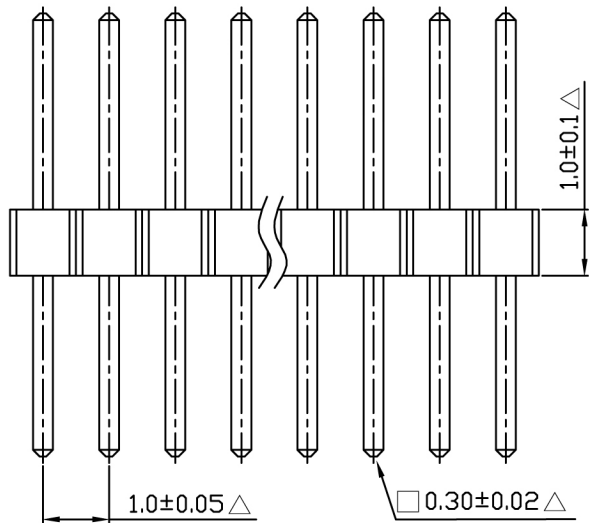

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P702</u>	- <u>X</u>	<u>X</u>	<u>X</u>	- <u>A / B</u>	- <u>XX</u>
(Pin Header Single Row) P702 (H:1.0 W:1.27)	S: Straight Type :	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold © Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T (Standard: N)	A (033) B (033) (If you desire on other length, by marking put desired in the A/B)	(02 TO 50 Contacts)

Dim(3.3/3.3) :

A: \_\_\_\_\_ B: \_\_\_\_\_

△ 此符號表示重點管控尺寸

DESCRIPTION(內容): <b>1.0mm Pin Header H:1.0 180° □=0.30 Nylon-6T</b>  PART NO: (料號)  DWG NO(圖號):	DRAWN(製圖):  CHECKED(確認):	GENERAL TOLERANCE: (公差) X. ±0.30 X.° 1/5.0' .X 0.20 .X° 1/3.0' .XX 0.15 .XX° 1/4.0'	REV: <b>A/1</b> UNIT: <b>mm</b> SIZE: <b>A4</b> SHEET: <b>1/1</b>	REV <b>1</b>  <b>2</b>  <b>3</b>  <b>4</b>	DESCRIPTION	DATE	
	APPROVAL(核准):	SCALE(比例): 1:XX					