


P. C. B Layout

### Specifications

Current Rating	:0.8 Amp
Insulator Resistance	:900 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C~ +105°C
Max Processing Temp	:260°C for 3~5 seconds
Contact Material	:Copper Alloy
Insulator Material	:High Temperature Thermoplastic. UL 94V-0
Standard	:Nylon-6T
Finish	:Tin, Gold Plated
Standard	:Gold Flash all over

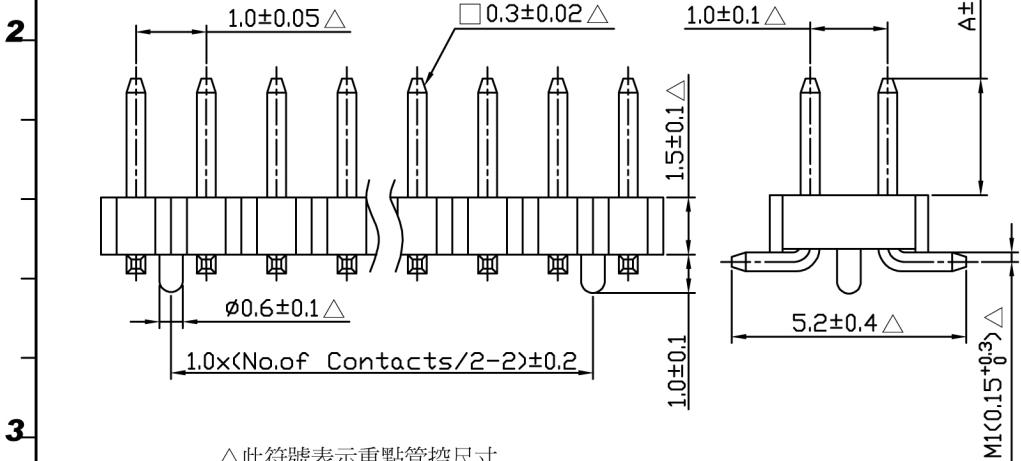

△此符號表示重點管控尺寸

### How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
P801	X	X	X	A	X X	P
(Pin Header Dual Row) P801 (H:1.5展開5.2)	M:SMT Type M1:0.15mm	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold	N:Nylon-6T (Standard:N)	A (018)	(04 TO 100 Contacts)	P:PEG
	⋮	⊙Duplex Plating D:Gold Flash/Tin (Standard:G)		(If you desire on other length, by marking put desired in the A)		

Dim(1.8):

A: \_\_\_\_\_

DESCRIPTION(內容): <b>1.0mm Pin Header SMT H:1.5 □=0.30 Nylon-6T, PEG</b>	DRAWN(製圖):	GENERAL TOLERANCE:(公差)	REV: A/1	REV	DESCRIPTION	DATE
	CHECKED(確認):	X. ±0.30 X.° ±5.0° .X ±0.20 .X° ±3.0° .XX ±0.15 .XX° ±1.0°	UNIT: mm	1		
PART NO:(料號)	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	2		
DWG NO(圖號):			SHEET: 1/1	3		
				4		