

P. C. B Hole Layout

Specifications



Current Rating	:0.8 Amp
Insulator Resistance	:900 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Brass
Insulator Material	:High Temperature Thermoplastic. UL 94V-0
Standard Finish	:Nylon-6T
Standard	:Tin, Gold Plated
	:Gold Flash all over

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P801</u>	- <u>X</u>	<u>X</u>	<u>X</u> -	<u>A / B</u>	- <u>XX</u>
(Pin Header Dual Row) P801 (H:1.5 W:3.17)	R:Right Angle Type (Down Angle Type) R9:0.48mm	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N)	A B (020) (019) (If you desire on other length, by marking put desired in the A/B)	(04 TO 100 Contacts)

Dim(2.0/1.9):

A: _____ B: _____

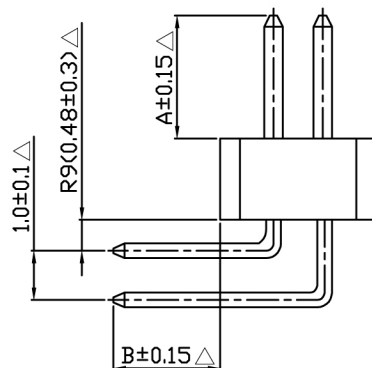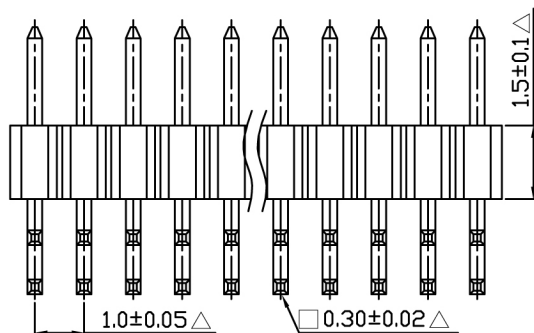

△ 此符號表示重點管控尺寸

DESCRIPTION(內容): 1.0mm Pin Header H:1.5 90° □=0.30 Nylon-6T PART NO: (料 號) DWG NO(圖號):	DRAWN(製圖): CHECKED(確認):	GENERAL TOLERANCE: (公差) X. ±0.30 X.° ±0.0° .X ±0.20 .X° ±0.0° .XX ±0.15 .XX° ±0.0°	REV: A/1 UNIT: mm SIZE: A4 SHEET: 1/1	REV 1 2 3 4	DESCRIPTION	DATE	
	APPROVAL(核准):	SCALE(比例): 1:XX					