

P. C. B Hole Layout



Specifications

Current Rating	: 0.8 Amp
Insulator Resistance	: 900 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40 °C ~ +105 °C
Contact Material	: Brass
Insulator Material	: High Temperature Thermoplastic. UL 94V-0
Standard	: Nylon-6T
Finish	: Tin, Gold Plated
Standard	: Gold Flash all over

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P801</u>	- <u>X</u>	<u>X</u>	<u>X</u>	- <u>A / B</u>	- <u>X X</u>
(Pin Header Dual Row) P801 (H:1.5 W:3.17)	S: Straight Type	G: Gold Flash T: Tin Plated A: 10U" Gold B: 15U" Gold C: 20U" Gold ◎ Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T (Standard: N)	A (020) B (015)	(04 TO 100 Contacts)

(If you desire on other length, by marking put desired in the A/B)

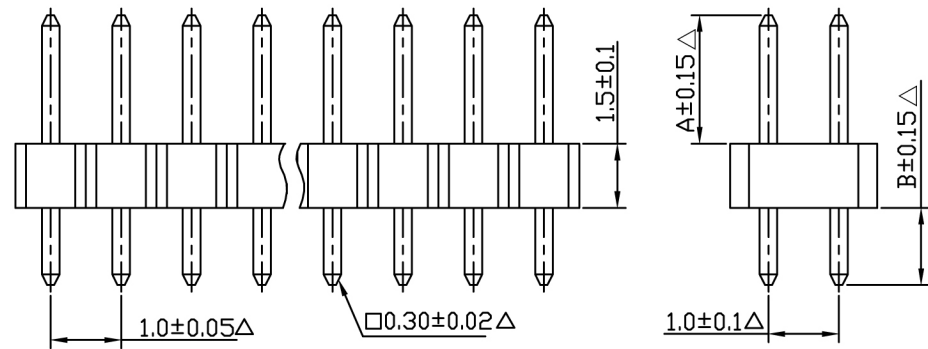

Dim(2.0/1.5):

A: _____ B: _____

※ △此符號表示重點管控尺寸

DESCRIPTION(內容): 1.0mm Pin Header H:1.5 180° □=0.30 Nylon-6T PART NO: (料號) DWG NO(圖號):	DRAWN(製圖): CHECKED(確認):	GENERAL TOLERANCE: (公差) X. ±0.30 X.° ±5.0° .X ±0.20 .X° ±3.0° .XX ±0.15 .XX° ±1.0°	REV: A/1 UNIT: mm SIZE: A4 SHEET: XIX	REV: 1 2 3 4	DESCRIPTION	DATE
	APPROVAL(核准):	SCALE(比例): 1:XX				