

P.C.B Hole Layout

Specifications



Current Rating	:0.8 Amp
Insulator Resistance	:900 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ~ +105°C
Contact Material	:Brass
Insulator Material	:High Temperature Thermoplastic. UL 94V-0
Standard Finish	:Nylon-6T
Standard	:Tin, Gold Plated
	:Gold Flash all over

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P802	X	X	X	A / B	X X
(Pin Header Dual Row) P802 (H:1.0 W:3.17)	R:Right Angle Type (Down Angle Type) R9:0.48mm	G:Gold Flash T:Tin Plated A:10U"Gold B:15U"Gold C:20U"Gold ©Duplex Plating D:Gold Flash/Tin (Standard:G)	N:Nylon-6T (Standard:N)	A B (020) (019) (If you desire on other length, by marking put desired in the A/B)	(04 TO 100 Contacts)

Dim(2.0/1.9):

A: _____ B: _____

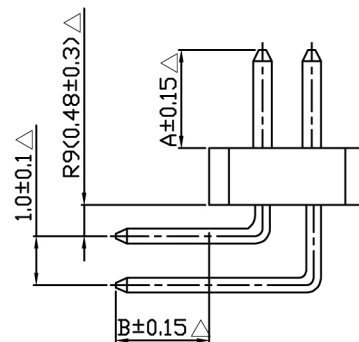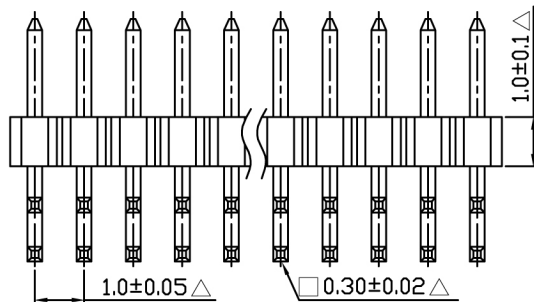

△ 此符號表示重點管控尺寸

DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE: (公差)	REV:	REV	DESCRIPTION	DATE
			A/1			
1.0mm Pin Header H:1.0 W:3.17 90° □ = 0.30 Nylon-6T	CHECKED(確認):	X. ±0.30 X.° 36.0' .X ±0.20 .X° 30.0' .XX ±0.15 .XX° 30.0'	UNIT:	1		
			mm			
PART NO: (料 號)	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE:	3		
			A4			
DWG NO(圖號):			SHEET:	4		
			1/1			