


P.C.B Layout

Specifications

Current Rating	: 0.8 Amp
Insulator Resistance	: 900 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40 °C ~ +105 °C
Soldering Temperature	: 260 °C for 3~5s Max.
Contact Material	: Phosphor Bronze
Insulator Material	: High Temperature Thermoplastic. UL 94V-0
Standard	: Nylon-6T
Finish	: Tin, Gold Plated
Standard	: Gold Flash all over

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts	Other
P804	X	X	X	A	X X	P
(Pin Header Dual Row) P804 (H: 1.0 W: 3.17 展開4.5)	M: SMT Type M1: 0.15mm ...	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ◎ Duplex Plating D: Gold Flash/Tin (Standard: G)	N: Nylon-6T (Standard: N)	A A (019) (If you desire on other length, by marking put desired in the A)	(04 TO 100 Contacts)	P: PEG

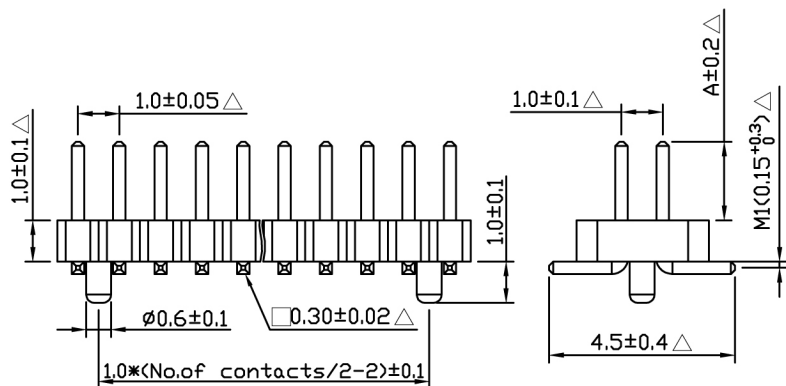

Dim(1.9):

A: _____

△ 此符號表示重點管控尺寸

DESCRIPTION(內容): 1.0mm Pin Header H:1.0 SMT □=0.30 Nylon-6T, PEG	DRAWN(製圖):	GENERAL TOLERANCE:(公差)	REV: A/1	REV	DESCRIPTION	DATE	
	CHECKED(確認):	X. ±0.30 X.° ±5.0° .X ±0.20 .X° ±3.0° .XX ±0.15 .XX° ±1.0°	UNIT: mm	1			
	PART NO:(料號)	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	3		
	DWG NO(圖號):			SHEET: 1/1	4		