
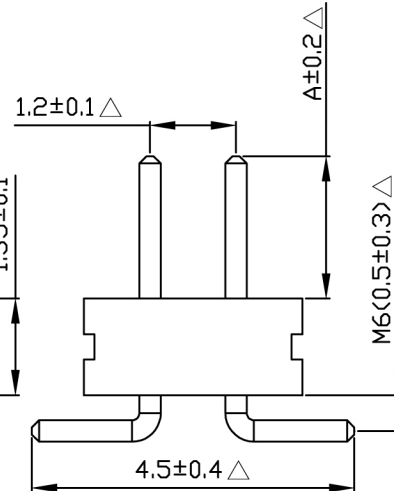


P. C. B Hole Layout

Specifications

Current Rating	: 0.8 Amp
Insulator Resistance	: 800 Megohms Min.
Dielectric Withstanding	: AC 500 V
Operating Temperature	: -40°C ~ +105°C
Soldering Temperature	: 260°C for 3~5s Max.
Contact Material	: Brass
Insulator Material	: High Temperature Thermoplastic. UL 94V-0
Standard Finish	: Nylon-6T
Standard	: Tin, Gold Plated
	: Gold Flash all over

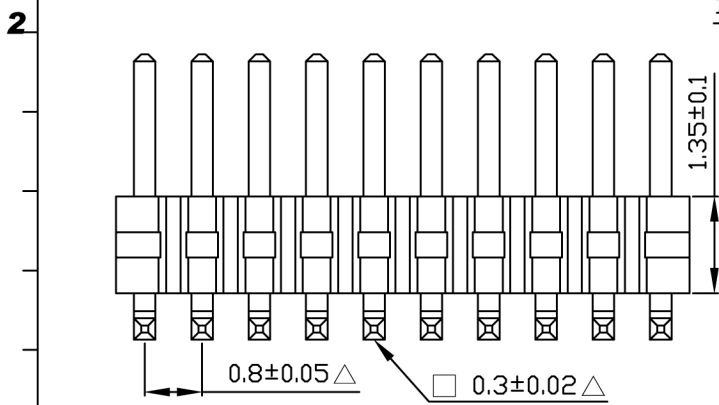

△此符號表示重點管控尺寸

How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
P901	X	X	X	A	X X
(Pin Header Dual Row)	M: SMT TYPE M6: 0.50mm	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold	N: Nylon-6T (Standard: N)	A (020)	(04 TO 100 Contacts)
P901 (H: 1.35 W: 3.05 展開4.5)		◎ Duplex Plating D: Gold Flash/Tin (Standard: G)		(If you desire on other length, by marking put desired in the A)	
Dim(2.0):	A: _____				

DESCRIPTION(內容): 0.8mm Pin Header H:1.35 SMT □=0.30 Nylon-6T PART NO: (料 號) DWG NO(圖號):	DRAWN(製圖): CHECKED(確認):	GENERAL TOLERANCE: (公差) X. ±0.30 X.° 1/5.0 ¹ .X .0.20 .X° 1/3.0 ¹ .XX .0.15 .XX° 1/4.0 ¹	REV: A/1 UNIT: mm SIZE: A4 SHEET: 1/1	REV: 1 2 3 4	DESCRIPTION	DATE
	APPROVAL(核准):	SCALE(比例): 1:XX				