


P. C. B Hold Layout

### Specifications

Current Rating	:0.8 Amp
Insulator Resistance	:800 Megohms Min.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40 °C ~ +105°C
Contact Material	:Phosphor Bronze
Insulator Material	:High Temperature Thermoplastic. UL 94V-0
Standard	:Nylon-6T
Finish	:Tin, Gold Plated
Standard	:Gold Flash all over

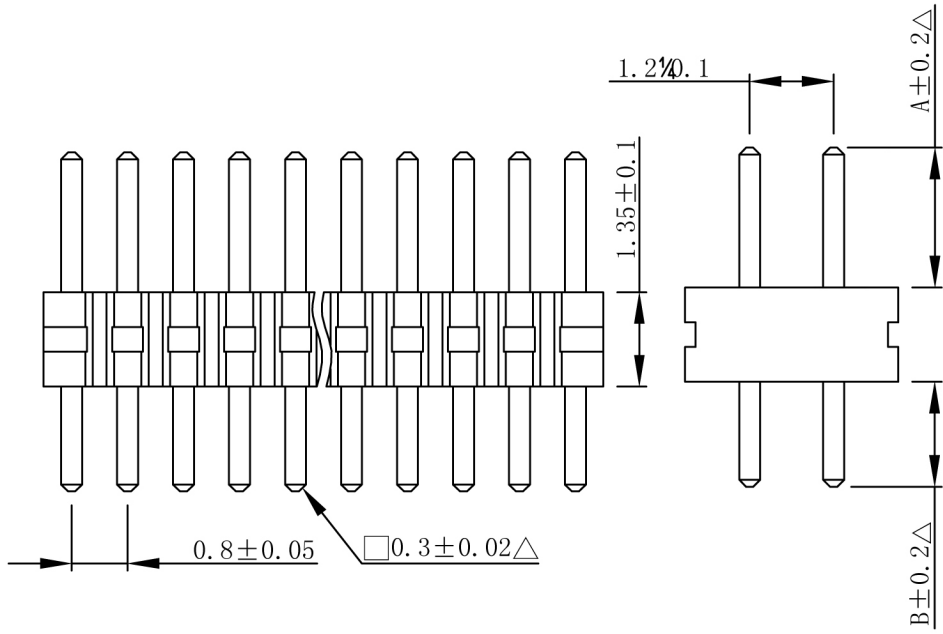

△此符號表示重點管控尺寸

### How to order

Series	Connector Type	Contact Plating	Material	Pin Length mm	Number of Contacts
<u>P901</u>	- <u>X</u>	<u>X</u>	<u>X</u> - <u>A / B</u>	- <u>X X</u>	
(Pin Header Dual Row) P901 (H:1.35 W:3.05)	S: Straight Type ⋮	G: Gold Flash T: Tin Plated A: 10U"Gold B: 15U"Gold C: 20U"Gold ⊙ Duplex Plating D: Gold Flash/Tin (Standard:G)	N: Nylon-6T (Standard:N)	A (020)    B (015)	(04 TO 100 Contacts)
Dim(2.0/1.5):			(If you desire on other length, by marking put desired in the A/B)		
A: _____ B: _____					

DESCRIPTION(內容): 0.8mm Pin Header H:1.35 180° □=0.30 Nylon-6T PART NO: (料 號) DWG NO(圖號):	DRAWN(製圖): CHECKED(確認):	GENERAL TOLERANCE: (公差) X. ±0.30 X.° /5.0 <sup>1</sup> .X .0.20 .X° /3.0 <sup>1</sup> .XX .0.15 .XX° /4.0 <sup>1</sup>	REV: <b>A/1</b> UNIT: <b>mm</b> SIZE: <b>A4</b> SHEET: <b>XIX</b>	REV <b>1</b> <b>2</b> <b>3</b> <b>4</b>	DESCRIPTION	DATE
	APPROVAL(核准):	SCALE(比例): 1:XX				