

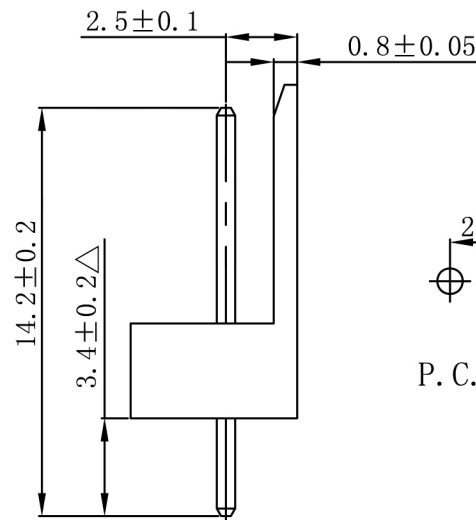


**SPECIFICATIONS**

Current rating : 3A AC, DC  
 Voltage rating : 250V AC, DC  
 Temperature range : -25°C ~ +85°C  
 Contact resistance : 10mΩMax  
 Insulation resistance : 1000MΩMin  
 Withstanding voltage : 1000 V AC/minute  
 Finished : Tin-plated  
 Housing Material : Nylon-66, UL94 V-0  
 Color : Ivory-white

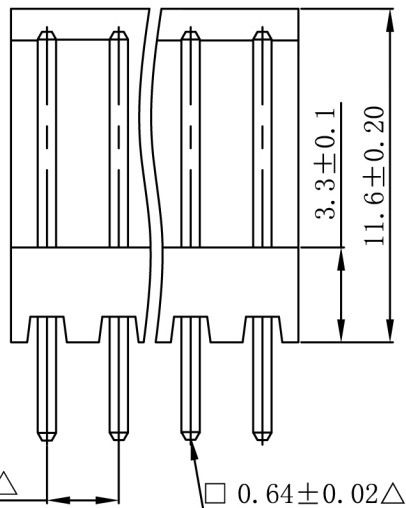

P. C. B Hole Layout

Circuits	Dimension mm	
	A	B
2PIN	2.50	5.00
3PIN	5.00	7.50
4PIN	7.50	10.00
5PIN	10.00	12.50
6PIN	12.50	15.00
7PIN	15.00	17.50
8PIN	17.50	20.00
9PIN	20.00	22.50
10PIN	22.50	25.00
11PIN	25.00	27.50
12PIN	27.50	30.00

DESCRIPTION(內容): <b>2.5mm Wafer 180° 塑膠顏色</b> 為乳白色(環保材料) PART NO: (料 號) <b>CA-W250-XX</b> DWG NO(圖號):	DRAWN(製圖): 周立軍	GENERAL TOLERANCE: (公差) .0 ±0.20 .00 ±0.15 .000 ±0.10	REV: <b>A/5</b>	REV <b>1</b>	DESCRIPTION △此符號表示重點管控尺寸	DATE <b>2006.09.21</b>	
	CHECKED(確認):	APPROVAL(核准):	SCALE(比例): 1:XX	UNIT: <b>mm</b>	REV <b>2</b>	DESCRIPTION 舊料號 :CX-2442-XX	DATE <b>2007.03.31</b>
				SHEET: <b>A4</b> <b>1/1</b>	REV <b>3</b>	DESCRIPTION 增加產品顏色標注	DATE <b>2007.06.28</b>
					REV <b>4</b>	DESCRIPTION 增加A,B尺寸	DATE <b>2009.07.04</b>