

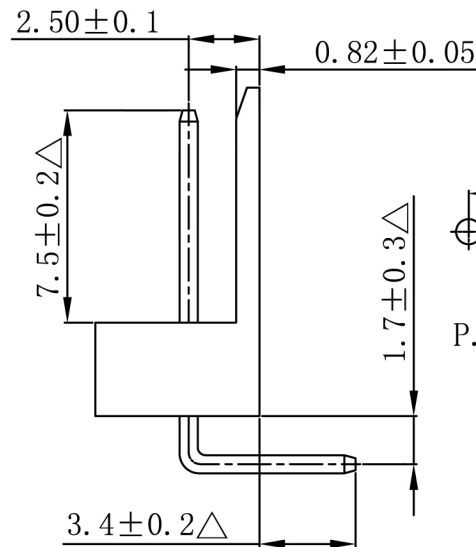


SPECIFICATIONS

Current rating : 3A AC, DC
 Voltage rating : 250V AC, DC
 Temperature range : -25°C ~ +85°C
 Contact resistance : 10mΩMax
 Insulation resistance : 1000MΩMin
 Withstanding voltage : 1000 V AC/minute
 Finished : Tin-plated
 Housing Material : Nylon-66, UL94 V-0
 Color : Ivory-white

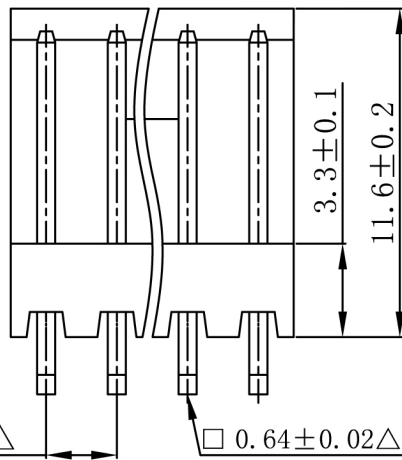

P.C.B Hole Layout

Circuits	Dimension mm	
	A	B
2PIN	2.50	5.00
3PIN	5.00	7.50
4PIN	7.50	10.00
5PIN	10.00	12.50
6PIN	12.50	15.00
7PIN	15.00	17.50
8PIN	17.50	20.00
9PIN	20.00	22.50
10PIN	22.50	25.00
11PIN	25.00	27.50
12PIN	27.50	30.00

DESCRIPTION (內容):
2.5mm Wafer 90° (環保材料)

PART NO:
 (料號) CA-W250R-XX

DWG NO(圖號):

DRAWN(製圖):
 周立軍

CHECKED(確認):
 師

APPROVAL(核准):

GENERAL TOLERANCE:
 (公差)

.0 ±0.20
 .00 ±0.15
 .000 ±0.10

SCALE(比例):

1:XX

REV:
 A/4

UNIT:
 mm

SIZE:
 A4

SHEET:
 1/1

REV

1

2

3

4

DESCRIPTION

△ 此符號表示重點管控尺寸

舊料號: CX-W2442R-XX

圖面有修改

增加A, B尺寸

DATE

2006.07.21

2007.06.16

2007.06.17

2009.07.06