
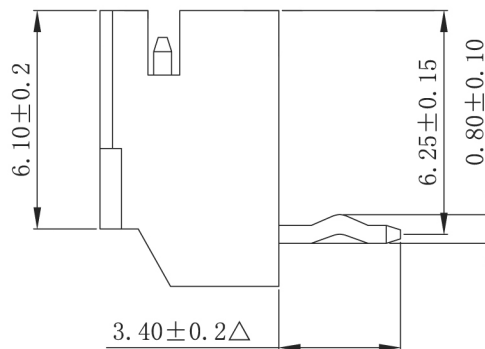


P. C. B. Hole Layout

Specificatis

Current Rating	: 3A AC, DC
Voltage rating	: 300V AC, DC
Temperature range	: -25°C ~ +85°C
Contact resistance	: 20mΩ Max
Insulation resistance	: 100MΩ Min
Withstanding voltage	: 1000 V AC/minute
Pin Material	: Brass
Finished	: Tin-plated
Housing Material	: Nylon-66, UL94 V-0
Color	: reddish orange

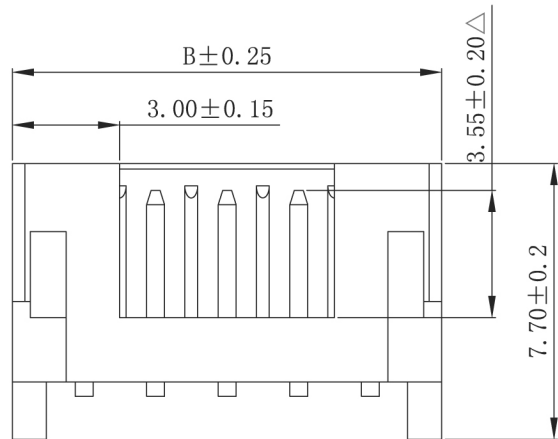

PARTS NO.	Circuits	Dimension mm		
		A (mm)	B (mm)	C (mm)
CAE-W20R-02	2	2.0	6.0	5.0
CAE-W20R-03	3	4.0	8.0	7.0
CAE-W20R-04	4	6.0	10.0	9.0
CAE-W20R-05	5	8.0	12.0	11.0
CAE-W20R-06	6	10.0	14.0	13.0
CAE-W20R-07	7	12.0	16.0	15.0
CAE-W20R-08	8	14.0	18.0	17.0
CAE-W20R-09	9	16.0	20.0	19.0
CAE-W20R-10	10	18.0	22.0	21.0
CAE-W20R-11	11	20.0	24.0	23.0
CAE-W20R-12	12	22.0	26.0	25.0
CAE-W20R-13	13	24.0	28.0	27.0
CAE-W20R-14	14	26.0	30.0	29.0
CAE-W20R-15	15	28.0	32.0	31.0
CAE-W20R-16	16	30.0	34.0	33.0

DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
CAE2.0mm Wafer 90° □ =0.50 打K (環保材料)	黃炳秋	.0 ±0.20 .00 ±0.15 .000 ±0.10	A/3	1	△此符號表示重點管控尺寸	2009.06.22
	CHECKED(確認):		UNIT: mm	2	更正顏色英文字母(橘紅色)	2010.11.02
PART NO: (料號) CAE-W20R-XX	APPROVAL(核准):	SCALE(比例): 1:XX	A4	3	增加尺寸管控	2013.12.17
DWG NO(圖號):			SHEET: 1/1	4		