


SECTION: (A-A)

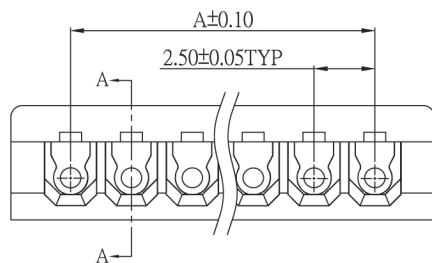

所有材料為
"環保材料"
2009.9.03
RoHS

SPECIFICATION:

PITCH BETWEEN POLES: 2.5mm

CURRENT RATING: 3A

VOLTAGE RATING: 250V

CONTACT RESISTANCE: INITIAL VALUE/10mΩ max.
AFTER ENVIRONMENTAL TESTING/20mΩ max.

INSULATION RESISTANCE: 1000MΩ (min.)

WITHSTAND VOLTAGE: 1000V AC/MINUTE

TEMPERATURE RANGE: -25° C TO+85° C

APPLICABLE WIRE: AWG #22 TO #28

FEATURES:

AVAILABLE NUMBER OF CIRCUITS 2 TO 15

MATERIAL: NYLON 66 UL94V-0

Dimensional and Order information

Poles	DIM:(mm)	
	A	B
02	2.50	7.40
03	5.00	9.90
04	7.50	12.40
05	10.00	14.90
06	12.50	17.40
07	15.00	19.90
08	17.50	22.40
09	20.00	24.90
10	22.50	27.40
11	25.00	29.90
12	27.50	32.40
13	30.00	34.90
14	32.50	37.40
15	35.00	39.90
16	37.50	42.40

Part No.	Color
CB-H250-XX	Natural
CB-H250-XXR	Red
CB-H250-XXY	Yellow
CB-H250-XXB	Black
CB-H250-XXBL	Blue

DESCRIPTION(內容):
Mox 2.5mm Pitch Housing

PART NO:
(料號) **CB-H250-XX**
DWG NO(圖號): **2507-H**

DRAWN(製圖):
GONG
CHECKED(確認):
MANDY
APPROVAL(核准):
JOHNNY

GENERAL TOLERANCE:
(公差)
.000 ±0.08
.00 ±0.13
.0 ±0.25
SCALE(比例):
FREE

REV:
R2
UNIT:
mm
SIZE:
A4
SHEET:
1/1

REV
R0
R1
R2
R3

DESCRIPTION
RELEASE
2009更新圖面&補充Color料號說明
2014年料號P數編碼統一兩碼

DATE
2004.04.06
2009.09.03
2014.12.19