
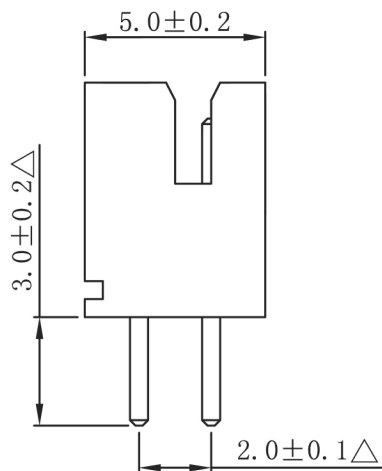


P. C. B Hole Layout

SPECIFICATIONS

Current rating : 2A AC, DC
 Voltage rating : 250V AC, DC
 Temperature range : $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact resistance : $10\text{m}\Omega\text{Max}$
 Insulation resistance : $1000\text{M}\Omega\text{Min}$
 Withstanding voltage : 800 V AC/minute
 Pin Material : Brass
 Finished : Tin-plated
 Housing Material : Nylon-66+30%GF, UL94 V-0
 Color : 本色

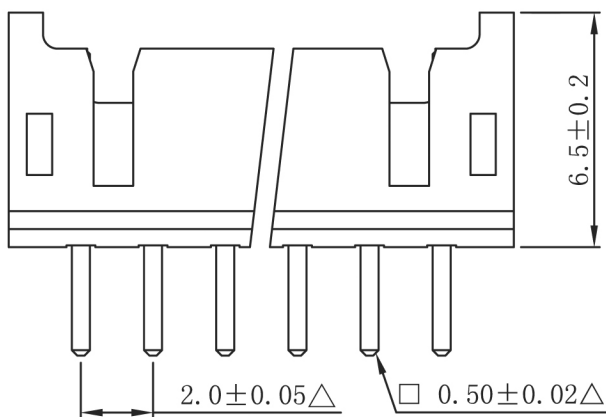

Circuits	Dimension mm	
	A	B
2*02	2.00	6.00
2*03	4.00	8.00
2*04	6.00	10.00
2*05	8.00	12.00
2*06	10.00	14.00
2*07	12.00	16.00
2*08	14.00	18.00
2*09	16.00	20.00
2*10	18.00	22.00
2*11	20.00	24.00
2*12	22.00	26.00
2*13	24.00	28.00
2*14	26.00	30.00
2*15	28.00	32.00
2*16	30.00	34.00
2*17	32.00	36.00
2*18	34.00	38.00
2*19	36.00	40.00
2*20	38.00	42.00

DESCRIPTION(內容):	DRAWN(製圖):	GENERAL TOLERANCE:	REV:	REV	DESCRIPTION	DATE
2.0mm Wafer 180° 塑膠為本色(環保材料)	李建安	.0 ±0.20 .00 ±0.15 .000 ±0.10	A/5	1	△此符號表示重點管控尺寸	2007.07.18
	CHECKED(確認):		UNIT: mm	2		
PART NO: (料號) CCP-HD20-2*XX	APPROVAL(核准):	SCALE(比例): 1:XX	A4	3	增加Pin數	2011.08.15
DWG NO(圖號):			SHEET: 1/1	4		