
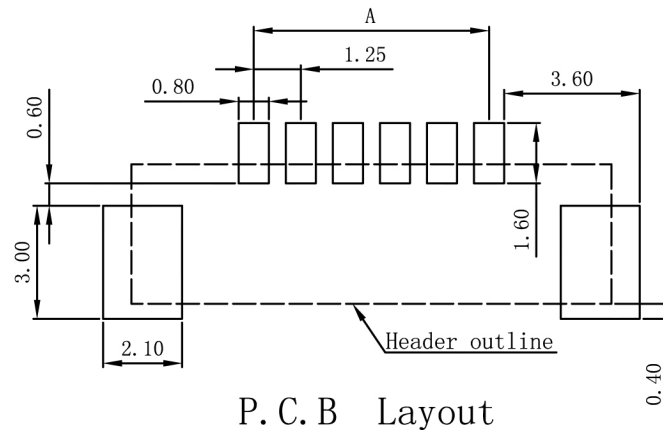



SPECIFICATIONS

Current rating : 1A AC, DC
 Voltage rating : 125V AC, DC
 Temperature range : $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact resistance : $20\text{m}\Omega\text{Max}$
 Insulation resistance : $100\text{M}\Omega\text{Min}$
 Withstanding voltage : 250 V AC/minute
 Pin Material : Copper Alloy
 Finished : Matt Tin
 Housing Material : Nylon-6T, UL94 V-0
 Color : Beige

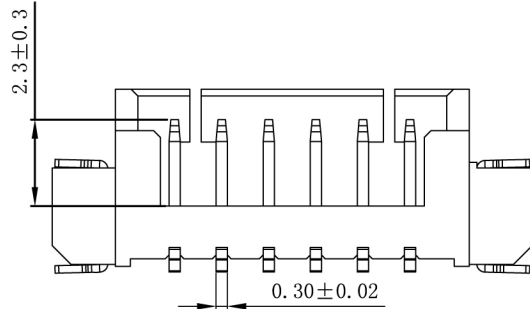

Circuits	Dimensions	
	A	B
02	1.25	7.75
03	2.50	9.00
04	3.75	10.25
05	5.00	11.50
06	6.25	12.75
07	7.50	14.00
08	8.75	15.25
09	10.00	16.50
10	11.25	17.75
11	12.50	19.00
12	13.75	20.25
13	15.00	21.50
14	16.25	22.75
15	17.50	24.00

DESCRIPTION(內容): 1.25mm Wafer 180° SMT (環保材料) PART NO: (料號) CCX-W125-XX-SMT DWG NO(圖號):	DRAWN(製圖): 王建平	GENERAL TOLERANCE: (公差) .0 ±0.20 .00 ±0.15 .000 ±0.10	REV: A/11 UNIT: mm SIZE: A4 SHEET: 1/1	REV 1 2 3 4	DESCRIPTION △此符號表示重點管控尺寸 修改Layout圖 增加尺寸2.3±0.3 變更塑胶高度	DATE 2007.10.09 2010.08.04 2010.09.10 2012.08.30
	CHECKED(確認):	APPROVAL(核准):	SCALE(比例): 1:XX			