
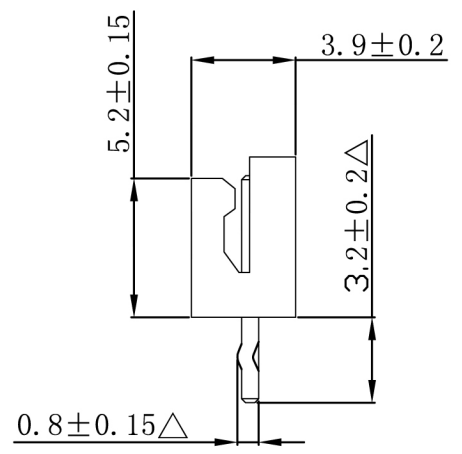


P. C. B Hole Layout

Specifications

Current Rating	: 2.5A AC, DC
Voltage rating	: 250V AC, DC
Temperature range	: -25°C ~ +85°C
Contact resistance	: 10mΩ Max
Insulation resistance	: 1000MΩ Min
Withstanding voltage	: 800 VAC/minute
Finished	: Tin-plated
Housing Material	: NL-66, UL94 V-0
Color	: Ivory-White

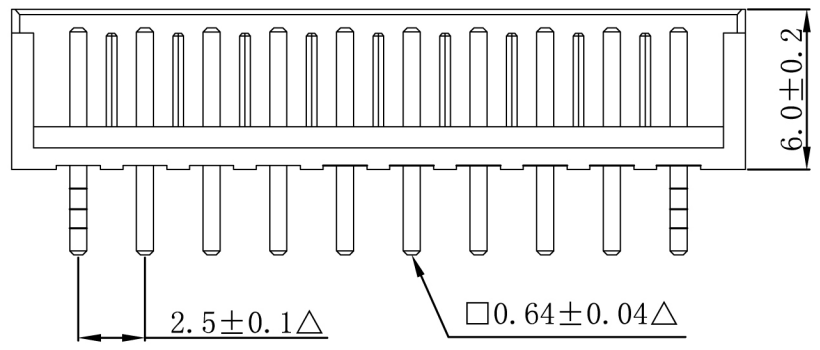

Ordering Information:

Patr No.	Dimensions mm	
	A	B
CE-W250-02	2.50	7.50
CE-W250-03	5.00	10.0
CE-W250-04	7.50	12.5
CE-W250-05	10.0	15.0
CE-W250-06	12.5	17.5
CE-W250-07	15.0	20.0
CE-W250-08	17.5	22.5
CE-W250-09	20.0	25.0
CE-W250-10	22.5	27.5
CE-W250-11	25.0	30.0
CE-W250-12	27.5	32.5
CE-W250-13	30.0	35.0
CE-W250-14	32.5	37.5
CE-W250-15	35.0	40.0

DESCRIPTION(內容): EH 2.50mm Wafer 180° 打反K □=0.64 (環保材料)	DRAWN(製圖): 李建安	GENERAL TOLERANCE: (公差)	REV: A/9	REV	DESCRIPTION	DATE
	CHECKED(確認):	.0 ±0.20 .00 ±0.15 .000 ±0.10	UNIT: mm	1	△此符號表示重點管控尺寸	2005.08.13
PART NO: (料號) CE-W250-XX	APPROVAL(核准):	SCALE(比例): 1:XX	SIZE: A4	2	由正K改為反K	2008.10.15
DWG NO(圖號):			SHEET: 1/1	3	增加尺寸标注(2.2±0.15)	2010.08.06
				4	品名規格有變更	2011.05.25