




Recommended Panel Thickness: 1.60

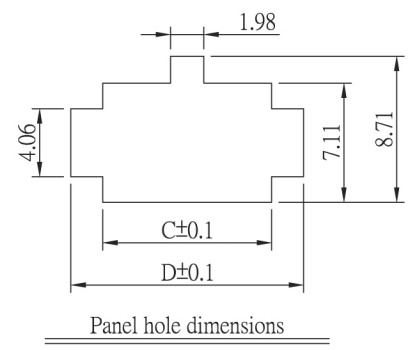

所有材料為  
"環保材料"  
2012.2.23  
RoHS

Specifications:

Material: Polyester, UL 94V-0.  
Voltage Rating: 250V.  
Current Rating: 5A.  
Withstand Voltage: 1500V AC/Minute.  
Insulation Resistance: 1000MΩ min.  
Temperature Range: -25°C ~ +85°C.  
Contact Resistance: Initial value/10mΩ max.  
After environmental testing/20mΩ max.  
Standard Color: Black.

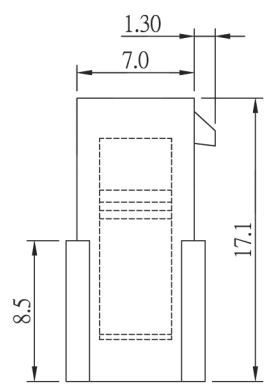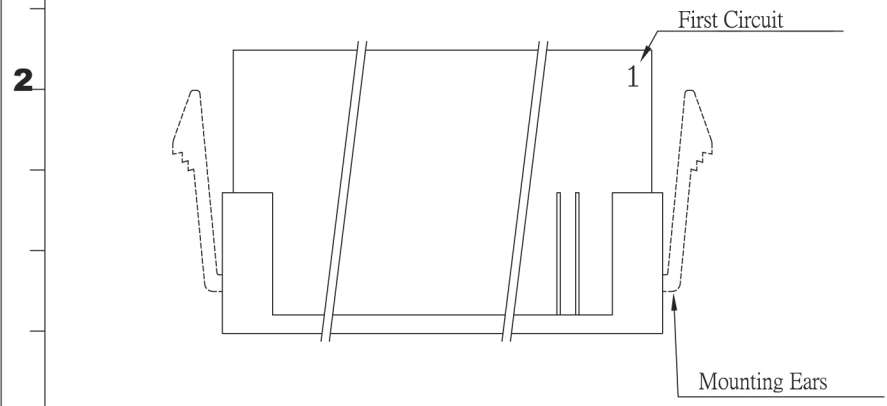

Dimensional & Ordering Information:

Circuits	Part NO.		Dimensions (mm)			
	With Mounting Ears	Without Mounting Ears	A	B	C	D
02	CMF-H300F-2x01	CMF-H300F1-2x01		3.9	4.21	7.90
04	CMF-H300F-2x02	CMF-H300F1-2x02	3.00	7.0	7.39	11.03
06	CMF-H300F-2x03	CMF-H300F1-2x03	6.00	10.0	10.36	14.03
08	CMF-H300F-2x04	CMF-H300F1-2x04	9.00	13.0	13.36	17.03
10	CMF-H300F-2x05	CMF-H300F1-2x05	12.00	16.0	16.36	20.03
12	CMF-H300F-2x06	CMF-H300F1-2x06	15.00	19.0	19.36	23.03
14	CMF-H300F-2x07	CMF-H300F1-2x07	18.00	22.0	22.36	26.03
16	CMF-H300F-2x08	CMF-H300F1-2x08	21.00	25.2	25.56	29.22
18	CMF-H300F-2x09	CMF-H300F1-2x09	24.00	28.2	28.56	32.22
20	CMF-H300F-2x10	CMF-H300F1-2x10	27.00	31.2	31.56	35.22
22	CMF-H300F-2x11	CMF-H300F1-2x11	30.00	34.2	34.56	38.22
24	CMF-H300F-2x12	CMF-H300F1-2x12	33.00	37.2	37.56	41.22

DESCRIPTION(內容): <b>3.0mm (.118") Micro-Fit Connentor / Plug</b>	DRAWN(製圖): <b>GONG</b>	GENERAL TOLERANCE: (公差) .X ±0.25 .XX ±0.13 .XXX ±0.08	REV: <b>R1</b>	REV	DESCRIPTION	DATE
	CHECKED(確認): <b>MANDY</b>		UNIT: <b>mm</b>			
PART NO: (料號) <b>CMF-H300FX-2xXX</b>	APPROVAL(核准): <b>JOHNNY</b>	SCALE(比例): <b>FREE</b>	SIZE: <b>A4</b>	<b>R1</b>	2014年8月料號P數編碼統一兩碼	<b>2015.01.21</b>
DWG NO(圖號): <b>5850-H</b>			SHEET: <b>1/1</b>	<b>R2</b>		
				<b>R3</b>		