


# Specifications:

- Material: Polyester, UL 94V-0
- Voltage Rating: 250V
- Current Rating: 5A
- Withstand Voltage: 1500V AC/Minute
- Insulation Resistance: 1000MΩ min.
- Temperature Range: -25°C~+85°C
- Contact Resistance: Initial value/10mΩ max.  
After environmental testing/20mΩ max.
- Standard Color: Black

## Dimensional & Ordering Information:

Circuits	Part No	Dimensions mm	
		A	B
02	CMF-H300M-2x01		4.0
04	CMF-H300M-2x02	3.00	7.0
06	CMF-H300M-2x03	6.00	10.0
08	CMF-H300M-2x04	9.00	13.0
10	CMF-H300M-2x05	12.00	16.0
12	CMF-H300M-2x06	15.00	19.0
14	CMF-H300M-2x07	18.00	22.0
16	CMF-H300M-2x08	21.00	25.2
18	CMF-H300M-2x09	24.00	28.2
20	CMF-H300M-2x10	27.00	31.2
22	CMF-H300M-2x11	30.00	34.2
24	CMF-H300M-2x12	33.00	37.2

所有材料為  
"環保材料"  
2009.6.06  
RoHS

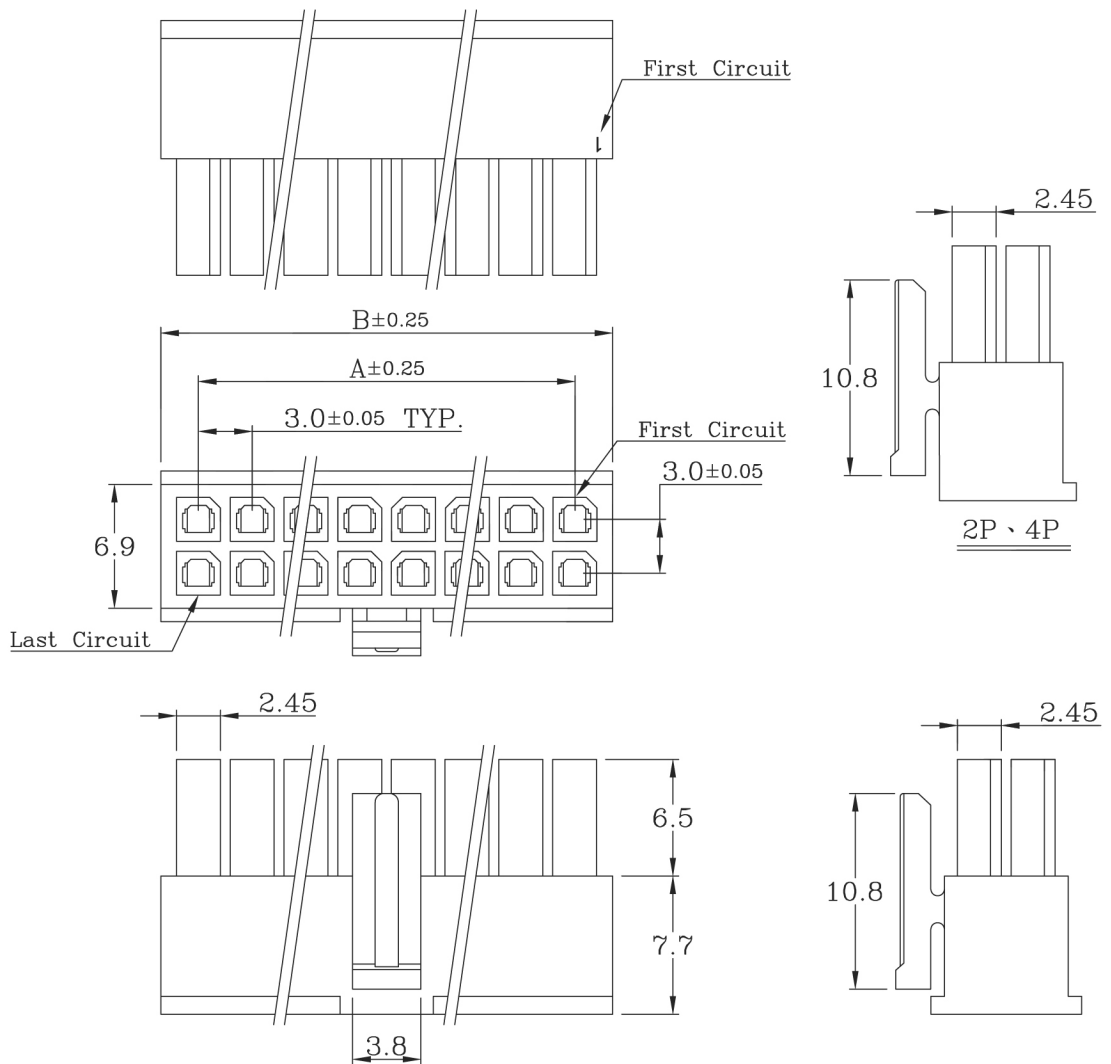

<b>DESCRIPTION(內容):</b> 3.0mm (.118") Micro-Fit connector  <b>PART NO:</b> (料號) <b>CMF-H300M-2xXX</b> <b>DWG NO(圖號):</b> 5750-H	<b>DRAWN(製圖):</b> GONG	<b>GENERAL TOLERANCE:</b> (公差) .000 ±0.08 .00 ±0.13 .0 ±0.25	<b>REV:</b> R1	<b>REV</b>	<b>DESCRIPTION</b> RELEASE 2014年8月料號P數編碼統一兩碼	<b>DATE</b> 2009.06.06 2015.01.21
	<b>CHECKED(確認):</b> MANDY		<b>UNIT:</b> mm	<b>R0</b>		<b>R1</b>
	<b>APPROVAL(核准):</b> JOHNNY	<b>SCALE(比例):</b> FREE		<b>A4</b>		<b>R2</b>
				<b>SHEET:</b> 1/1		<b>R3</b>