

A B C D E

**SPECIFICATIONS**

Current rating : 2A AC,DC

Voltage rating : 250V AC,DC

Temperature range : -25°C to +85 °C

Contact resistance : 20mΩ Max.

Insulation resistance : 1000MΩ Min.




Withstanding voltage : 800V AC/minute

Material : Nylon 66, UL94V-2

所有材料為  
"環保材料"  
2007.3.01  
RoHS

Ordering Information & Dimensions

Poles	Dimension (mm)		Part No.	Note.
	A	B		
02	2.50	6.00	CS-H250-02	
03	5.00	8.50	CS-H250-03	
04	7.50	11.00	CS-H250-04	
05	10.00	13.50	CS-H250-05	
06	12.50	16.00	CS-H250-06	
07	15.00	18.50	CS-H250-07	
08	17.50	21.00	CS-H250-08	
09	20.00	23.50	CS-H250-09	
10	22.50	26.00	CS-H250-10	
11	25.00	28.50	CS-H250-11	
12	27.50	31.00	CS-H250-12	
13	30.00	33.50	CS-H250-13	
14	32.50	36.00	CS-H250-14	
15	35.00	38.50	CS-H250-15	
16	37.50	41.00	CS-H250-16	
17	40.00	43.50	CS-H250-17	
18	42.50	46.00	CS-H250-18	
19	45.00	48.50	CS-H250-19	
20	47.50	51.00	CS-H250-20	

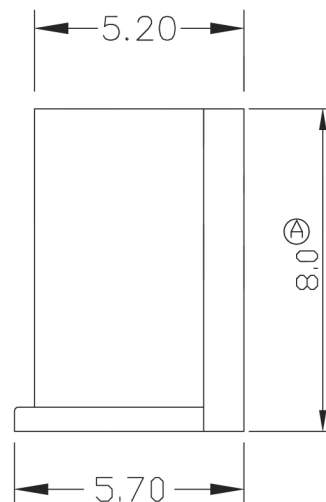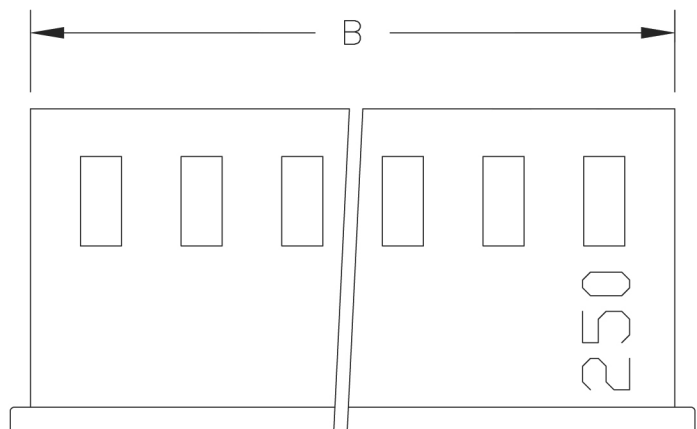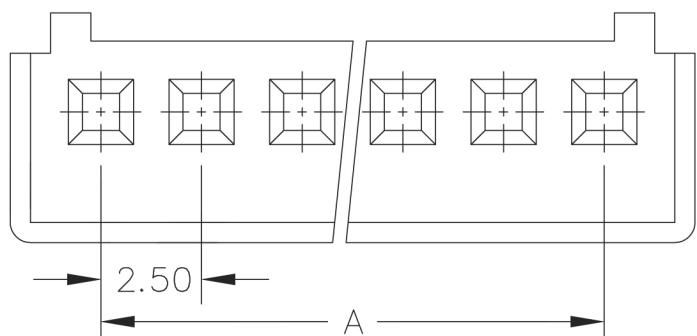

1

2

3

1

2

3

DESCRIPTION(內容): <b>2.5mm Wire-to-Board Housing</b> PART NO: (料號) <b>CS-H250-XX</b> DWG NO(圖號): <b>2500-H</b>	DRAWN(製圖): <b>GONG</b>	GENERAL TOLERANCE: (公差) X.XX ± 0.2 X.X ± 0.3	REV: <b>R2</b>	REV <b>R0</b> <b>R1</b> <b>R2</b> <b>R3</b>	DESCRIPTION RELEASE (ROSH) 補充尺寸(A) 2014料號P數編碼統一兩碼	DATE <b>2007.03.01</b> <b>2008.11.06</b> <b>2014.12.19</b>
	CHECKED(確認): <b>MAMDY</b>		UNIT: <b>mm</b>			
	APPROVAL(核准): <b>JOHNNY</b>	SCALE(比例): <b>FREE</b>	SIZE: <b>A4</b>			
			SHEET: <b>1/1</b>			