

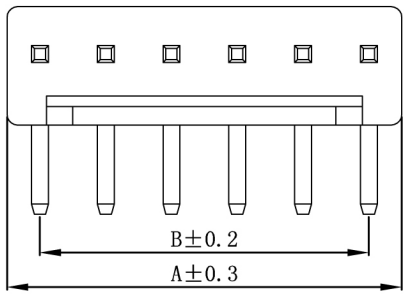
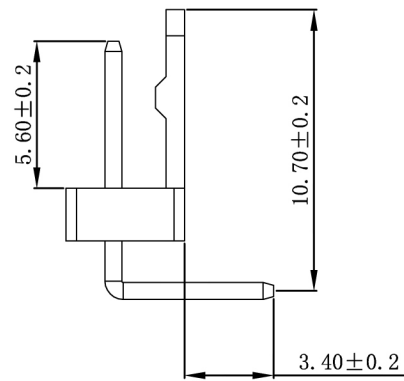


Specifications

Current Rating : 4A AC, DC
 Voltage rating : 250V AC, DC
 Temperature range : -25°C ~ +85°C
 Contact resistance : 10mΩ Max
 Insulation resistance : 1000MΩ Min
 Withstanding voltage : 1000 V AC/minute
 Pin Material : Brass
 Finished : Tin-plated
 Housing Material : Nylon-66, UL94 V-2
 Color : Beige

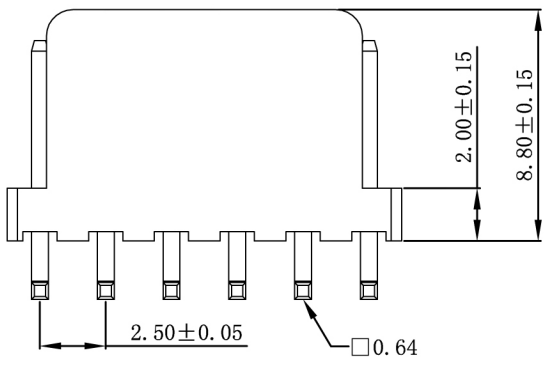

P. C. B LAYOUT

Circuits	Part NO.	Dimension mm	
		A	B
02	CS-250R-02	2.50	5.00
03	CS-250R-03	5.00	7.50
04	CS-250R-04	7.50	10.00
05	CS-250R-05	10.00	12.50
06	CS-250R-06	12.50	15.00
07	CS-250R-07	15.00	17.50
08	CS-250R-08	17.50	20.00
09	CS-250R-09	20.00	22.50
10	CS-250R-10	22.50	25.00
11	CS-250R-11	25.00	27.50
12	CS-250R-12	27.50	30.00
13	CS-250R-13	30.00	32.50
14	CS-250R-14	32.50	35.00
15	CS-250R-15	35.00	37.50
16	CS-250R-16	37.50	40.00
17	CS-250R-17	40.00	42.50
18	CS-250R-18	42.50	45.00
19	CS-250R-19	45.00	47.50
20	CS-250R-20	47.50	50.00

DESCRIPTION(內容):
 MX 2.5mm Wafer 90° □=0.64
 (環保材料)
PART NO:
 (料號) **CS-W250R-XX**
DWG NO(圖號):

DRAWN(製圖):
 鄧文廣
CHECKED(確認):
APPROVAL(核准):

GENERAL TOLERANCE:
 (公差)
 .0 ±0.20
 .00 ±0.15
 .000 ±0.10
SCALE(比例):
 1:XX

REV:
A/1
UNIT:
 mm
SIZE:
A4
SHEET:
 1/1

REV
1
2
3
4

DESCRIPTION
 △此符號表示重點管控尺寸

DATE
2008.02.03